



PRODUCT FEATURES

- Seamless Illumination
- Spot Free Lens
- Line Voltage Integral Driver
- Even Illumination on Surfaces
- Easy Plug-and-Play Installation
- AC Power Driver Built In
- Round **Opal Diffuser**
- Quick Ship Available


PRODUCT SPECIFICATIONS

- Voltage: AC 120V
- Operating Temperature: 32-113°(0-45°C)
- Lamp Life: 50,000 hrs L70
- Available Color: 2700K, 3000K, 3500K, 4000K, (6000K for option)
- CRI/Ra >85
- Energy Efficiency: 75 lm/W - 5W/ft -375lm/ft
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification
- Degree of protection IP20    Beam Angle : 170°
- Finish: White
- 5 year Warranty

\* Pending factory availability

DIMENSIONS

| Model Number        | Voltage Input (V) | Power Input (W) | A inches (mm) | B inches (mm) | C inches (mm) | B' inches (mm) | C' inches (mm) |
|---------------------|-------------------|-----------------|---------------|---------------|---------------|----------------|----------------|
| ELS5 (Color)K-120V  | AC 120            | 5               | 12.5" (319)   | .95" (24.3)   | 1.29" (32.7)  | 1.06" (27)     | 1.4" (35.5)    |
| ELS10 (Color)K-120V | AC 120            | 10              | 22.8" (580)   | .95" (24.3)   | 1.29" (32.7)  | 1.06" (27)     | 1.4" (35.5)    |
| ELS15 (Color)K-120V | AC 120            | 15              | 34.65" (880)  | .95" (24.3)   | 1.29" (32.7)  | 1.06" (27)     | 1.4" (35.5)    |
| ELS20 (Color)K-120V | AC 120            | 20              | 46.45" (1180) | .95" (24.3)   | 1.29" (32.7)  | 1.06" (27)     | 1.4" (35.5)    |

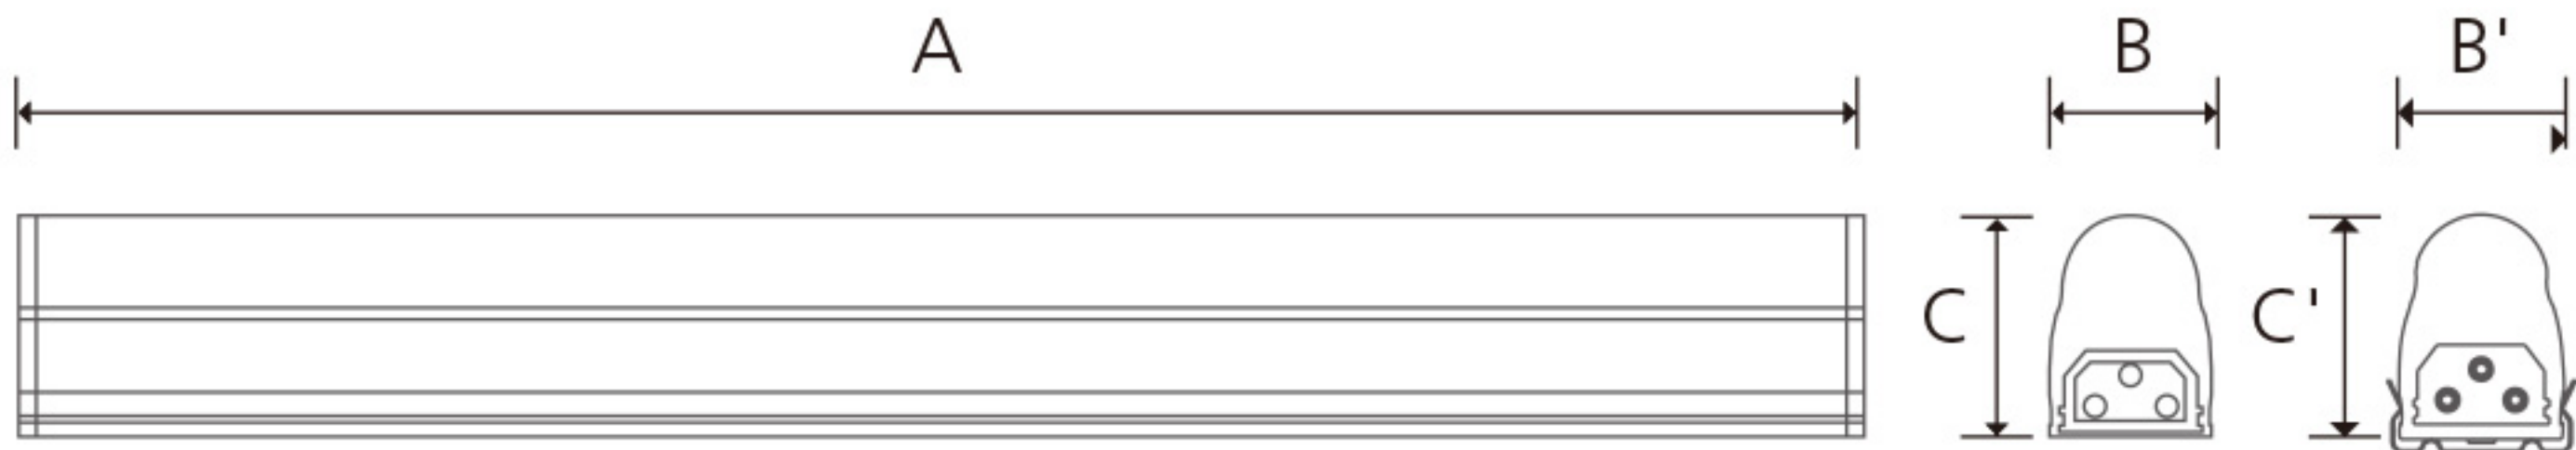


SPECIFICATION DIAGRAM

Power Options


Option 1 - Cord & Plug



Option 2 - Hardwire

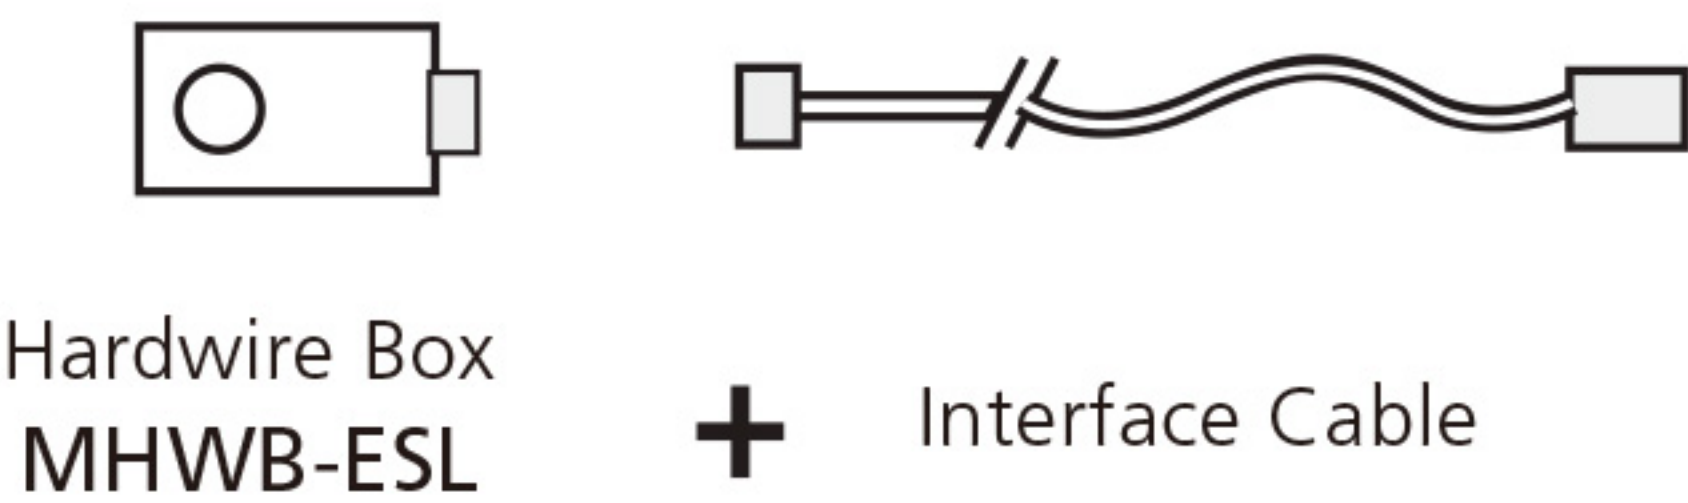

Fixture Connector Options

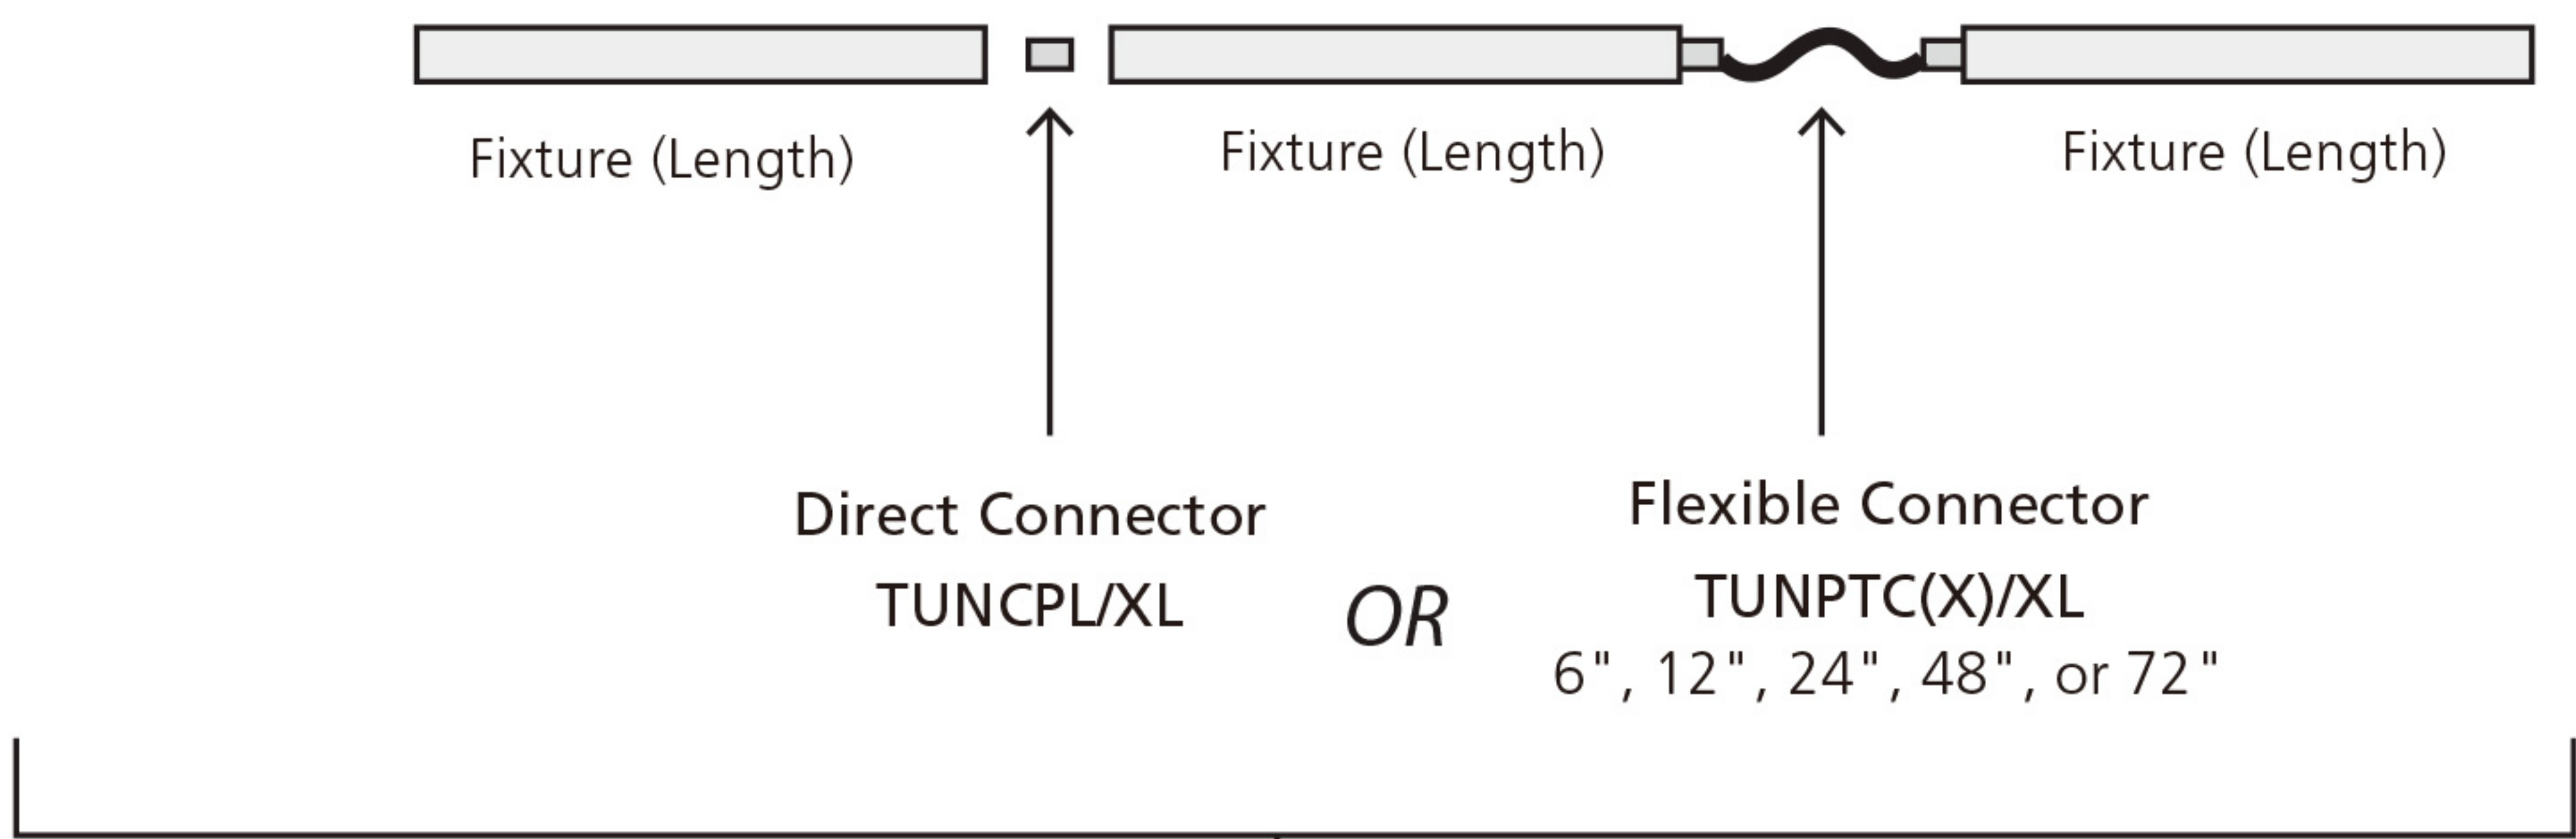


400 WATT MAX LOAD PER POWER CORD OR HARDWIRE BOX(NON-DIMMING)








LED: **400W**



FIXTURES AND ACCESSORIES DIMENSIONS

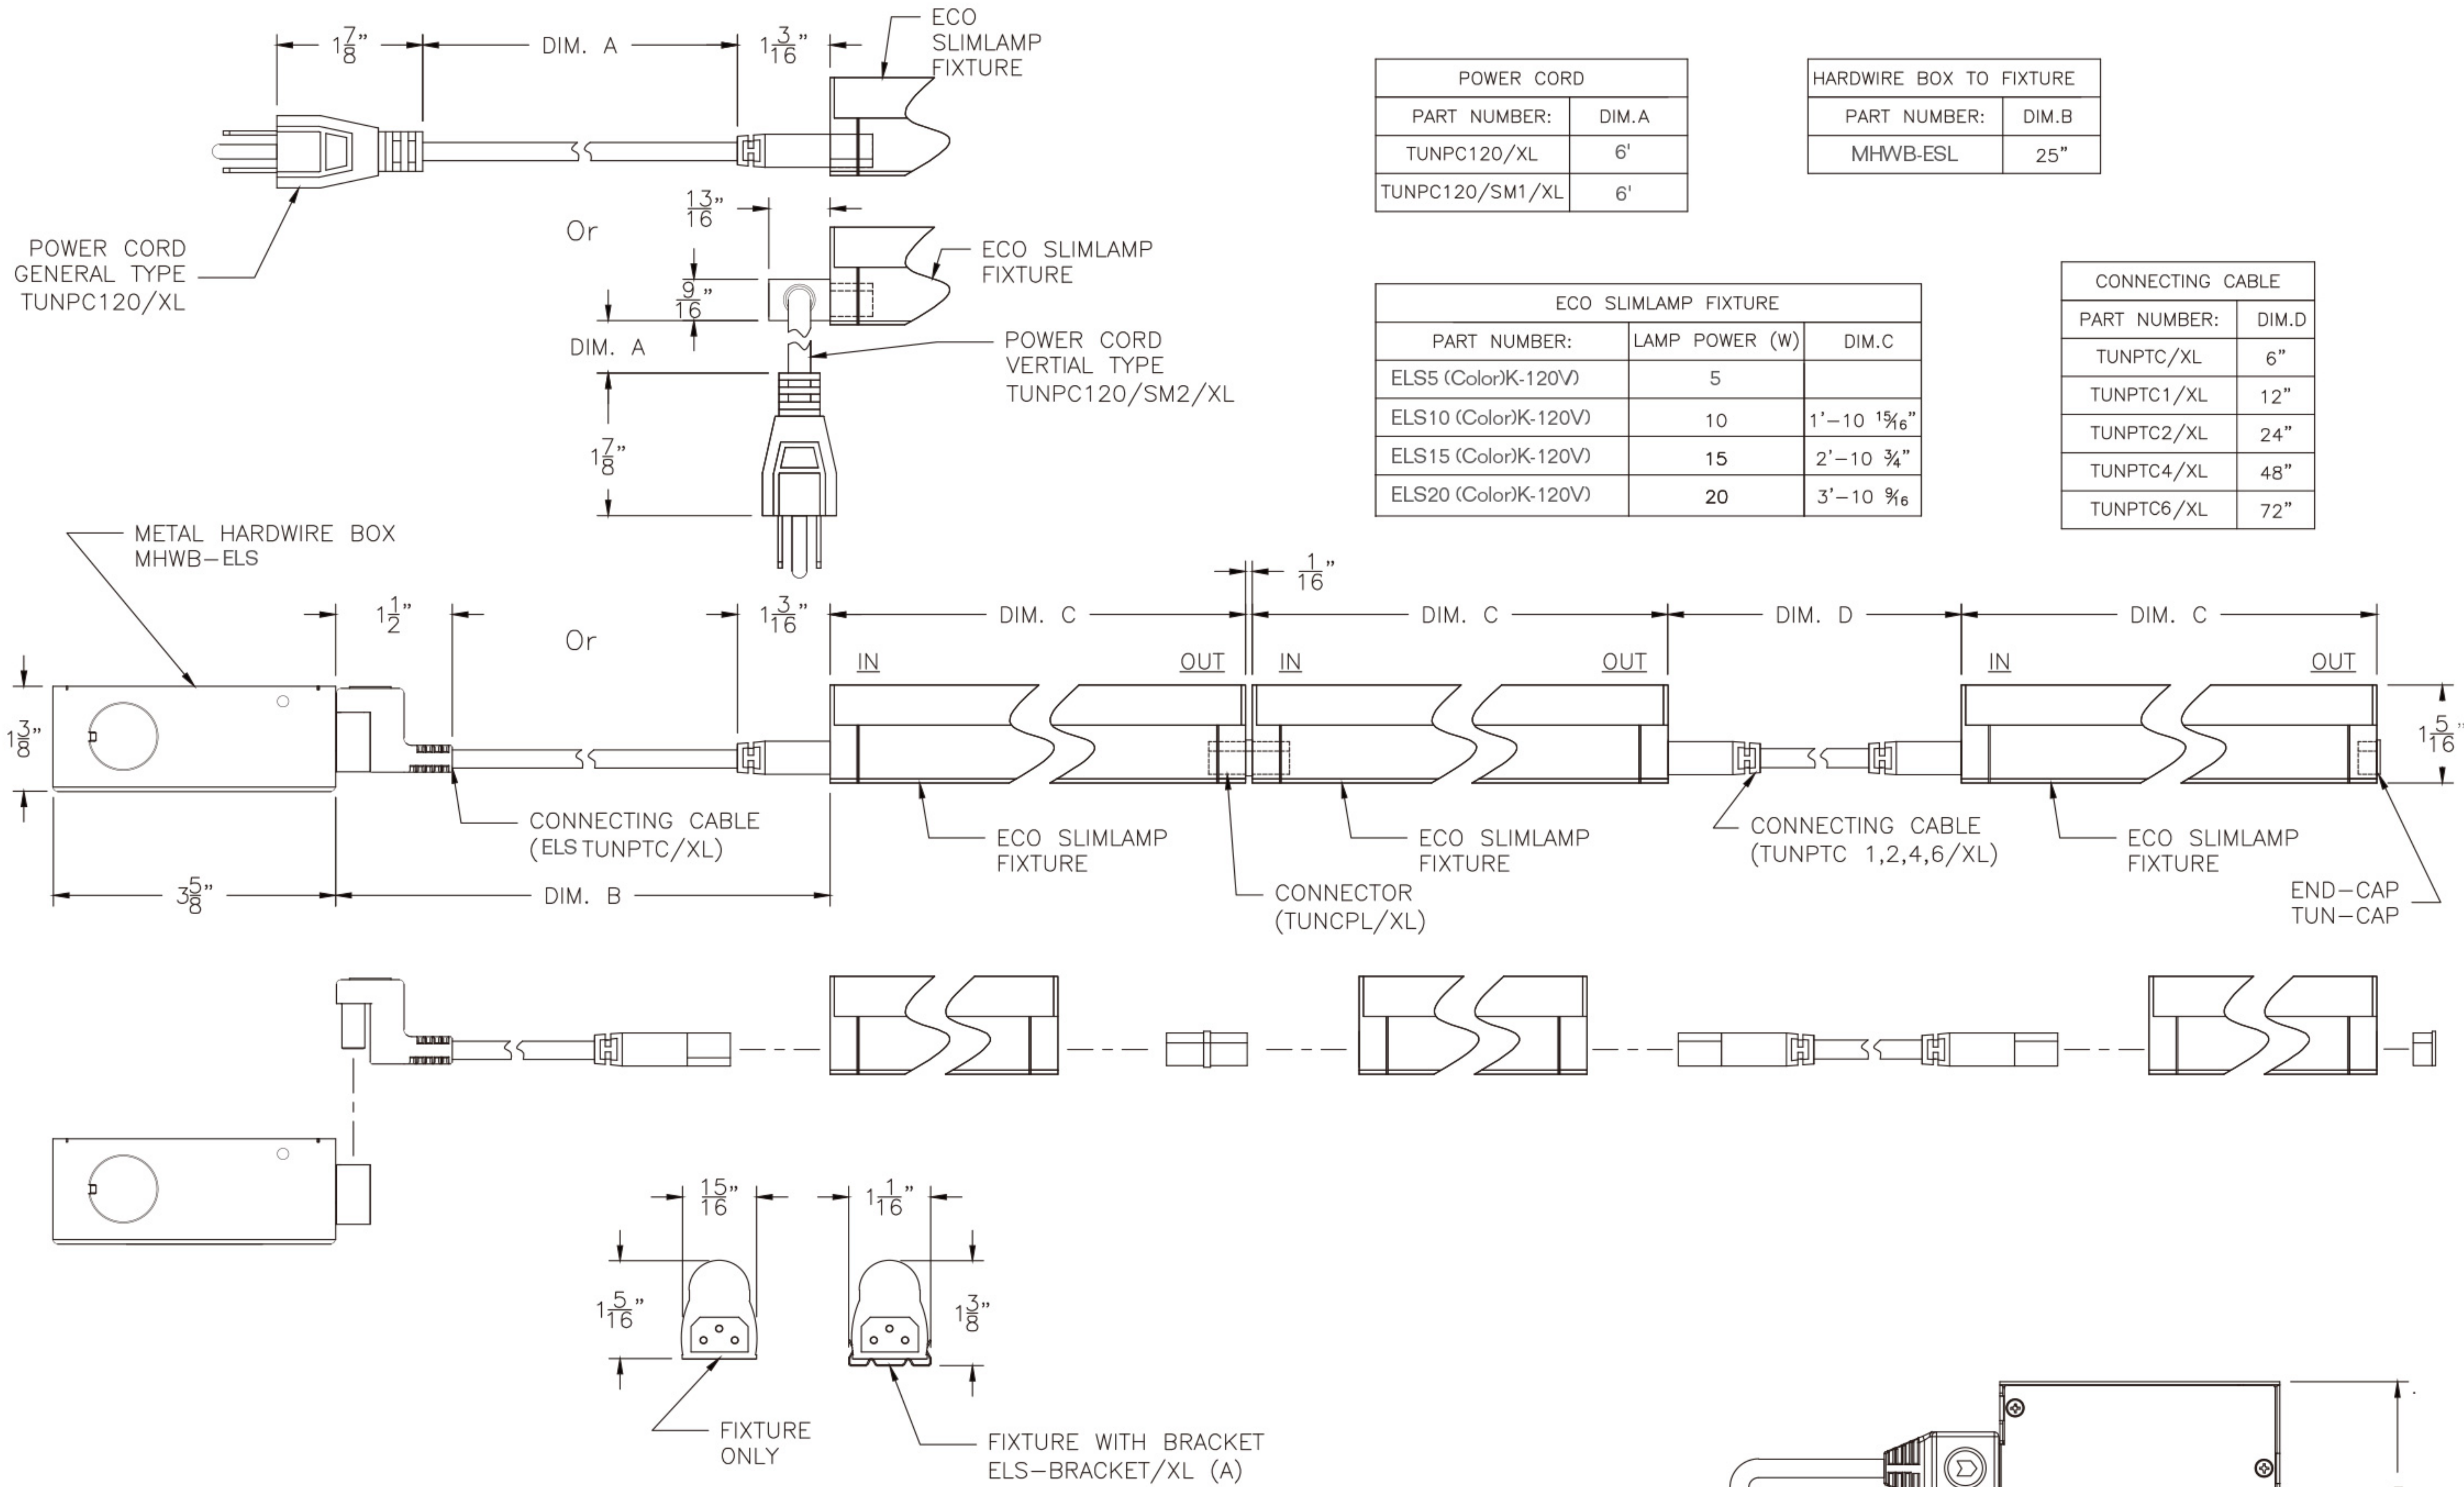

BEAM SPREADS

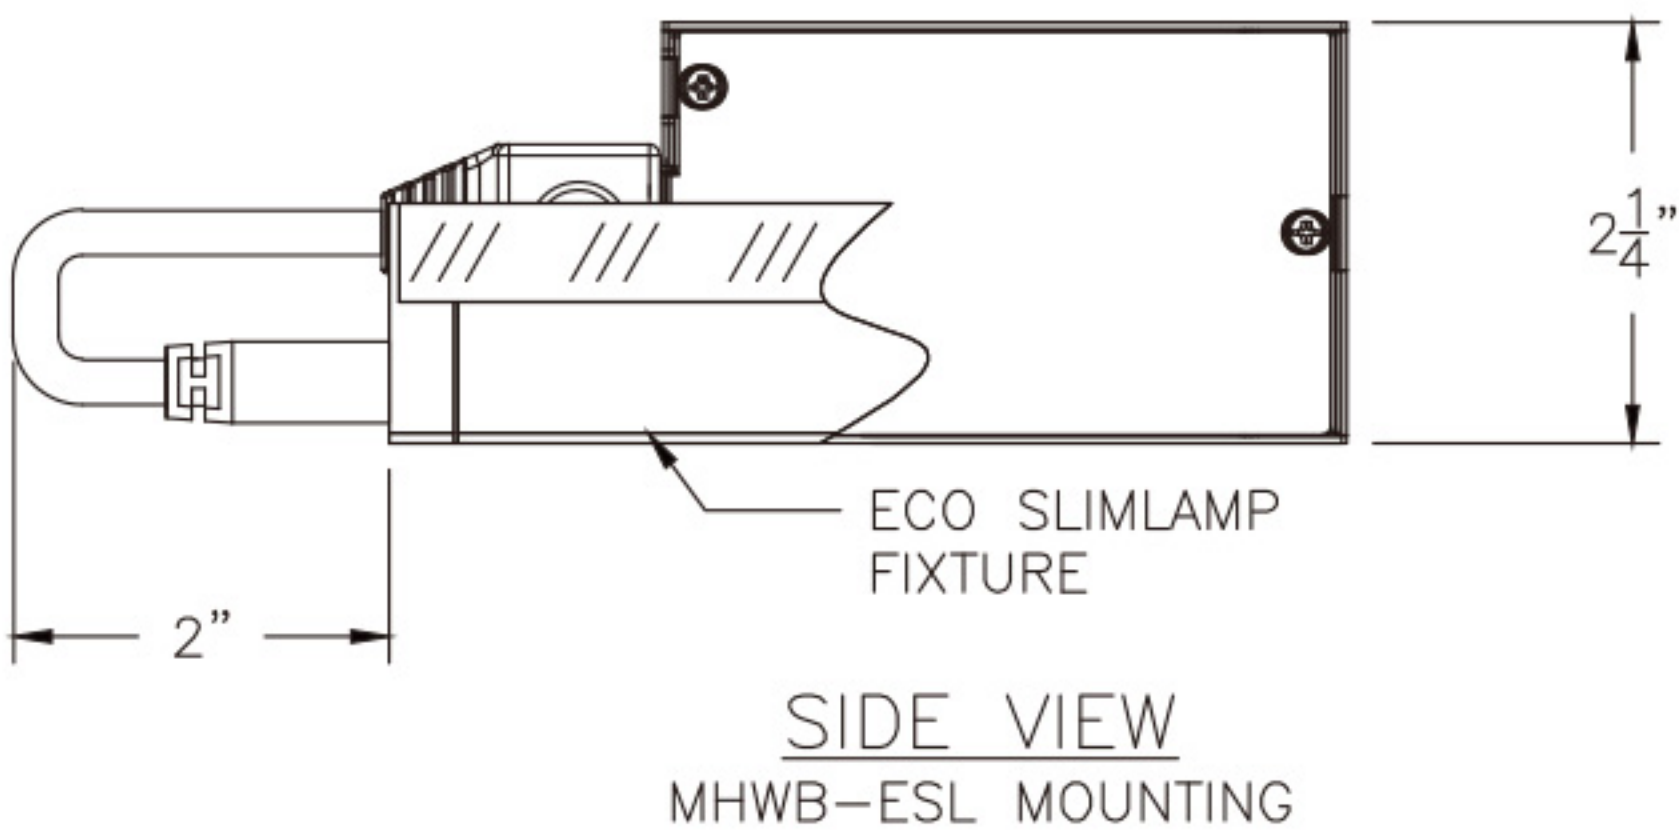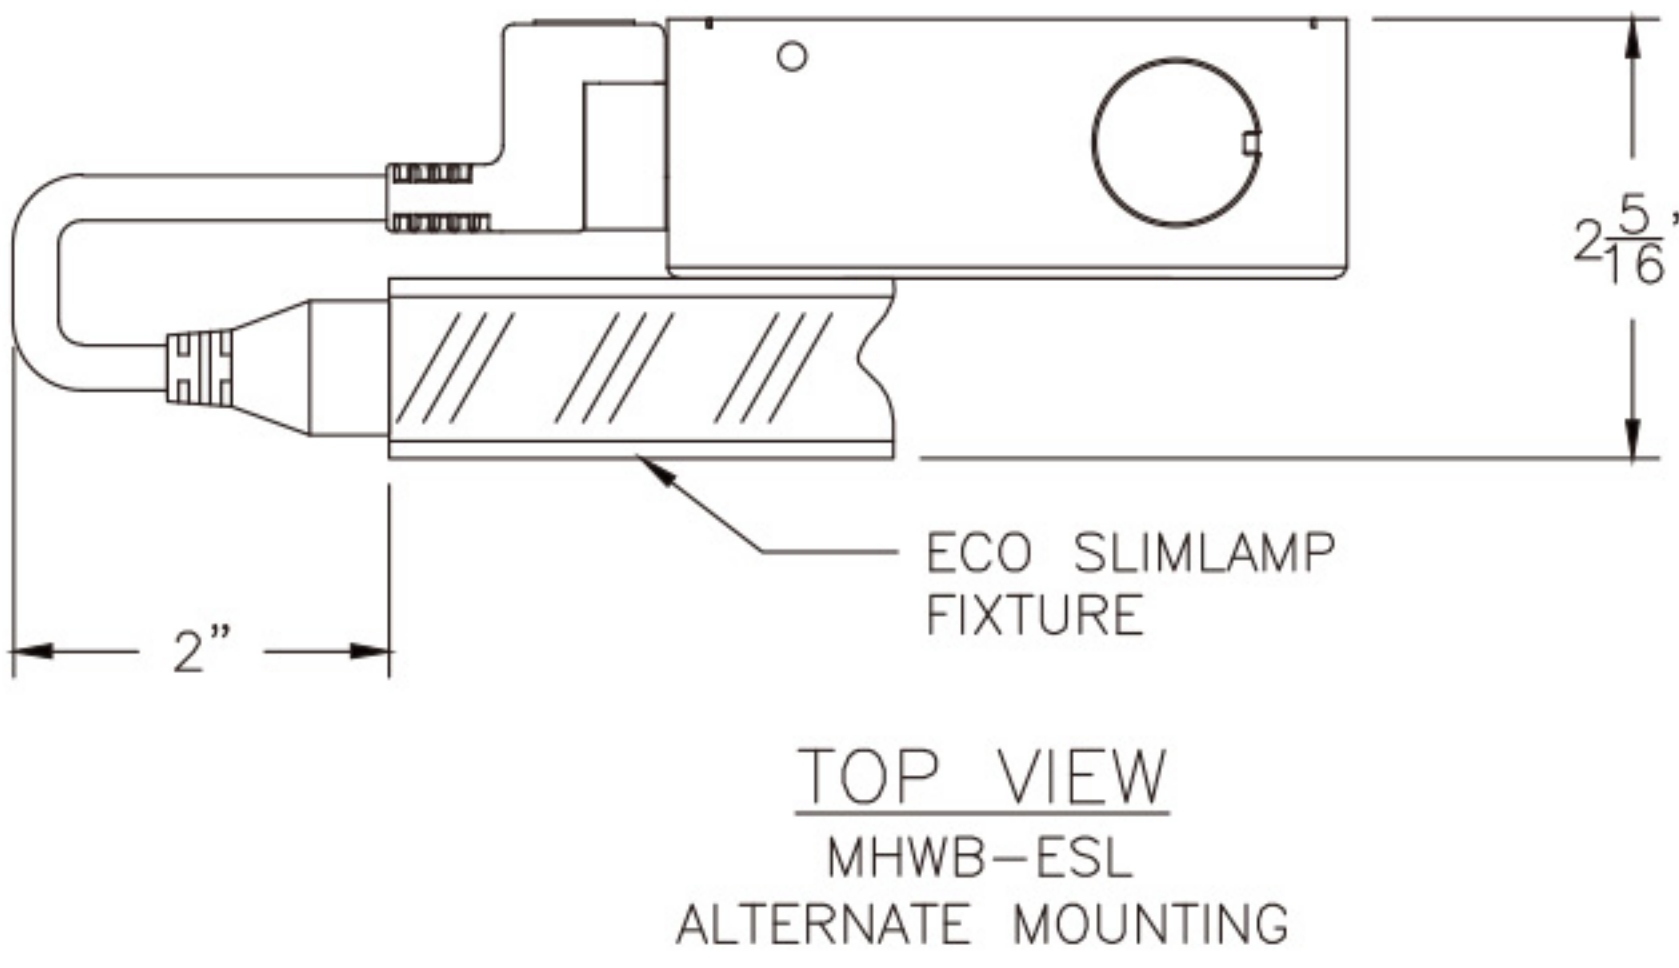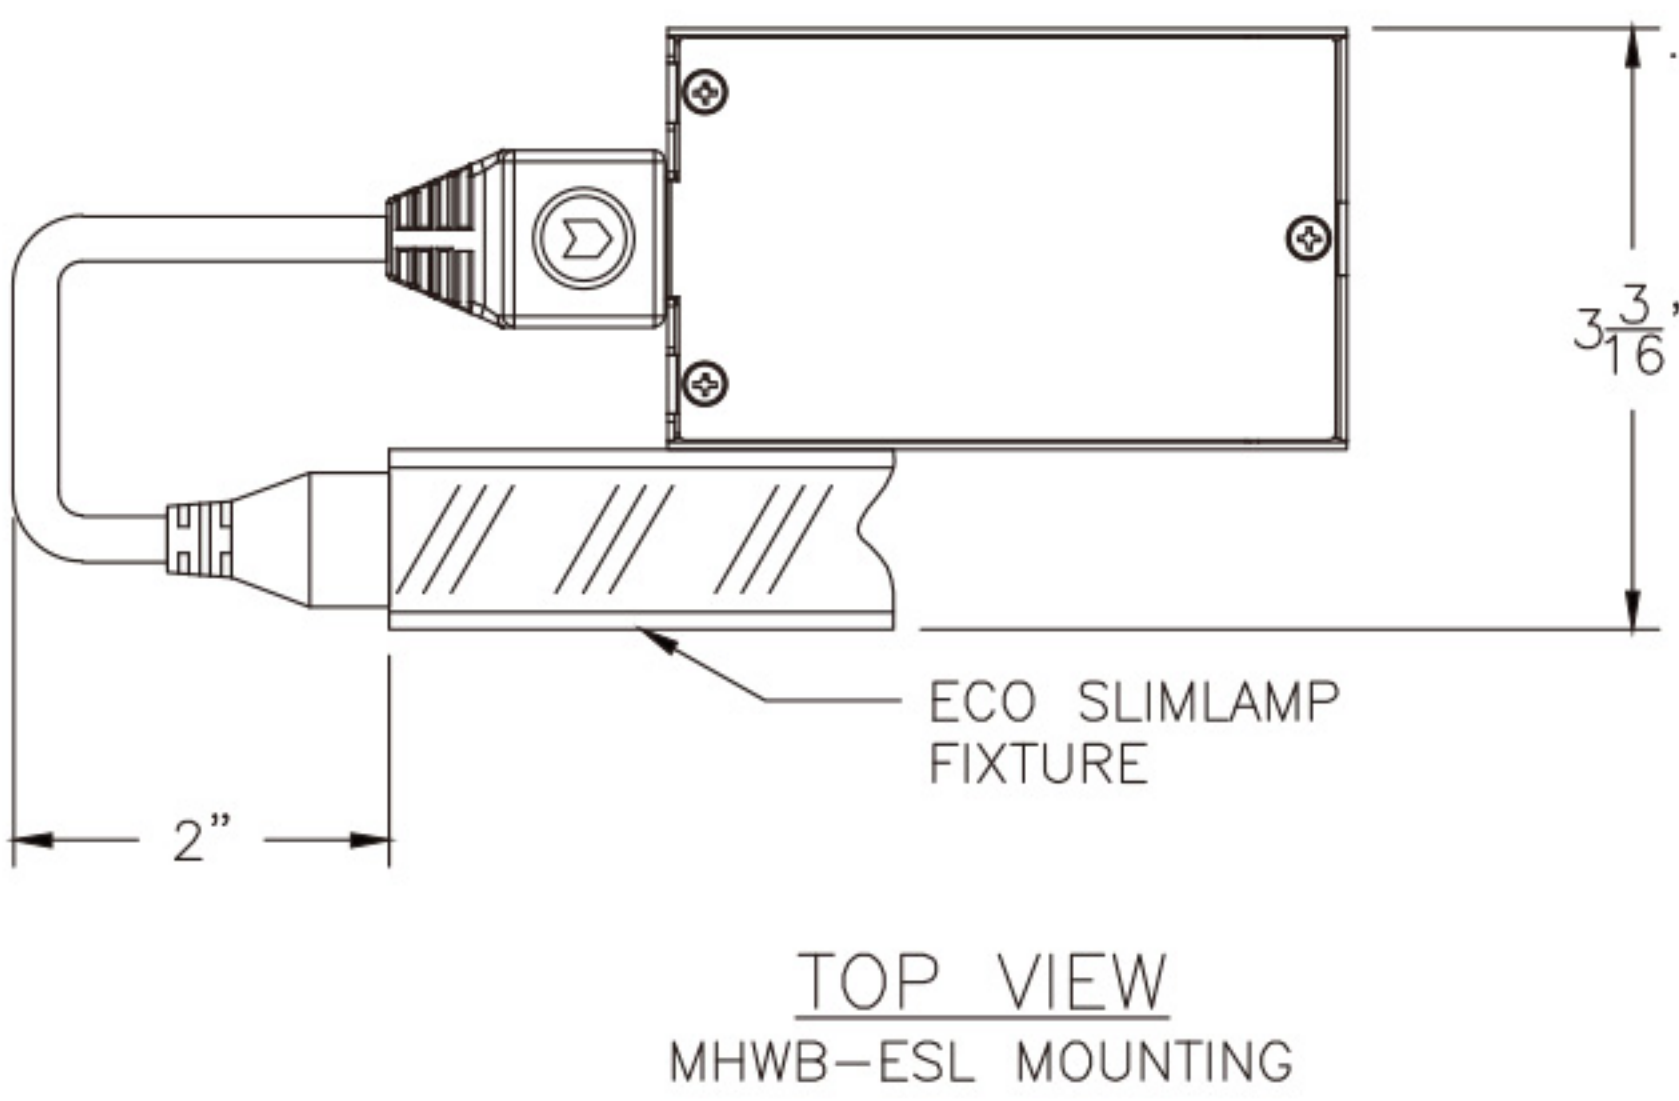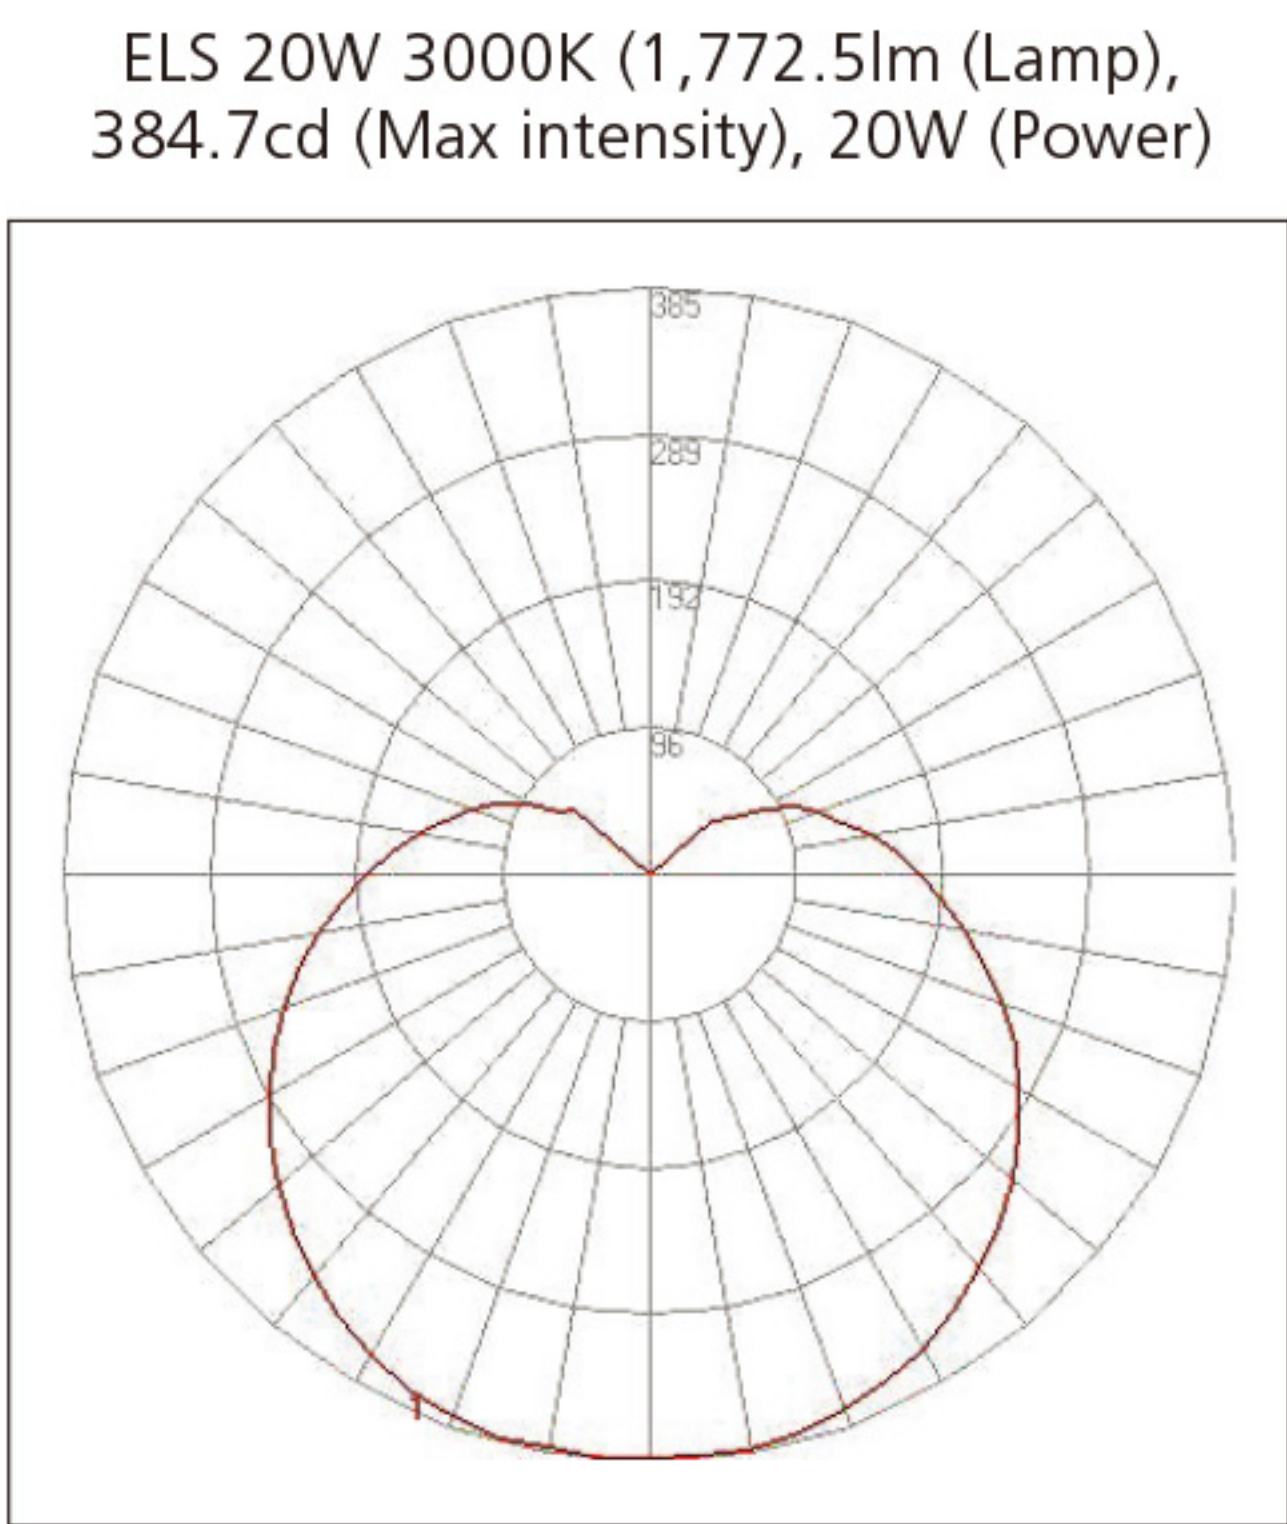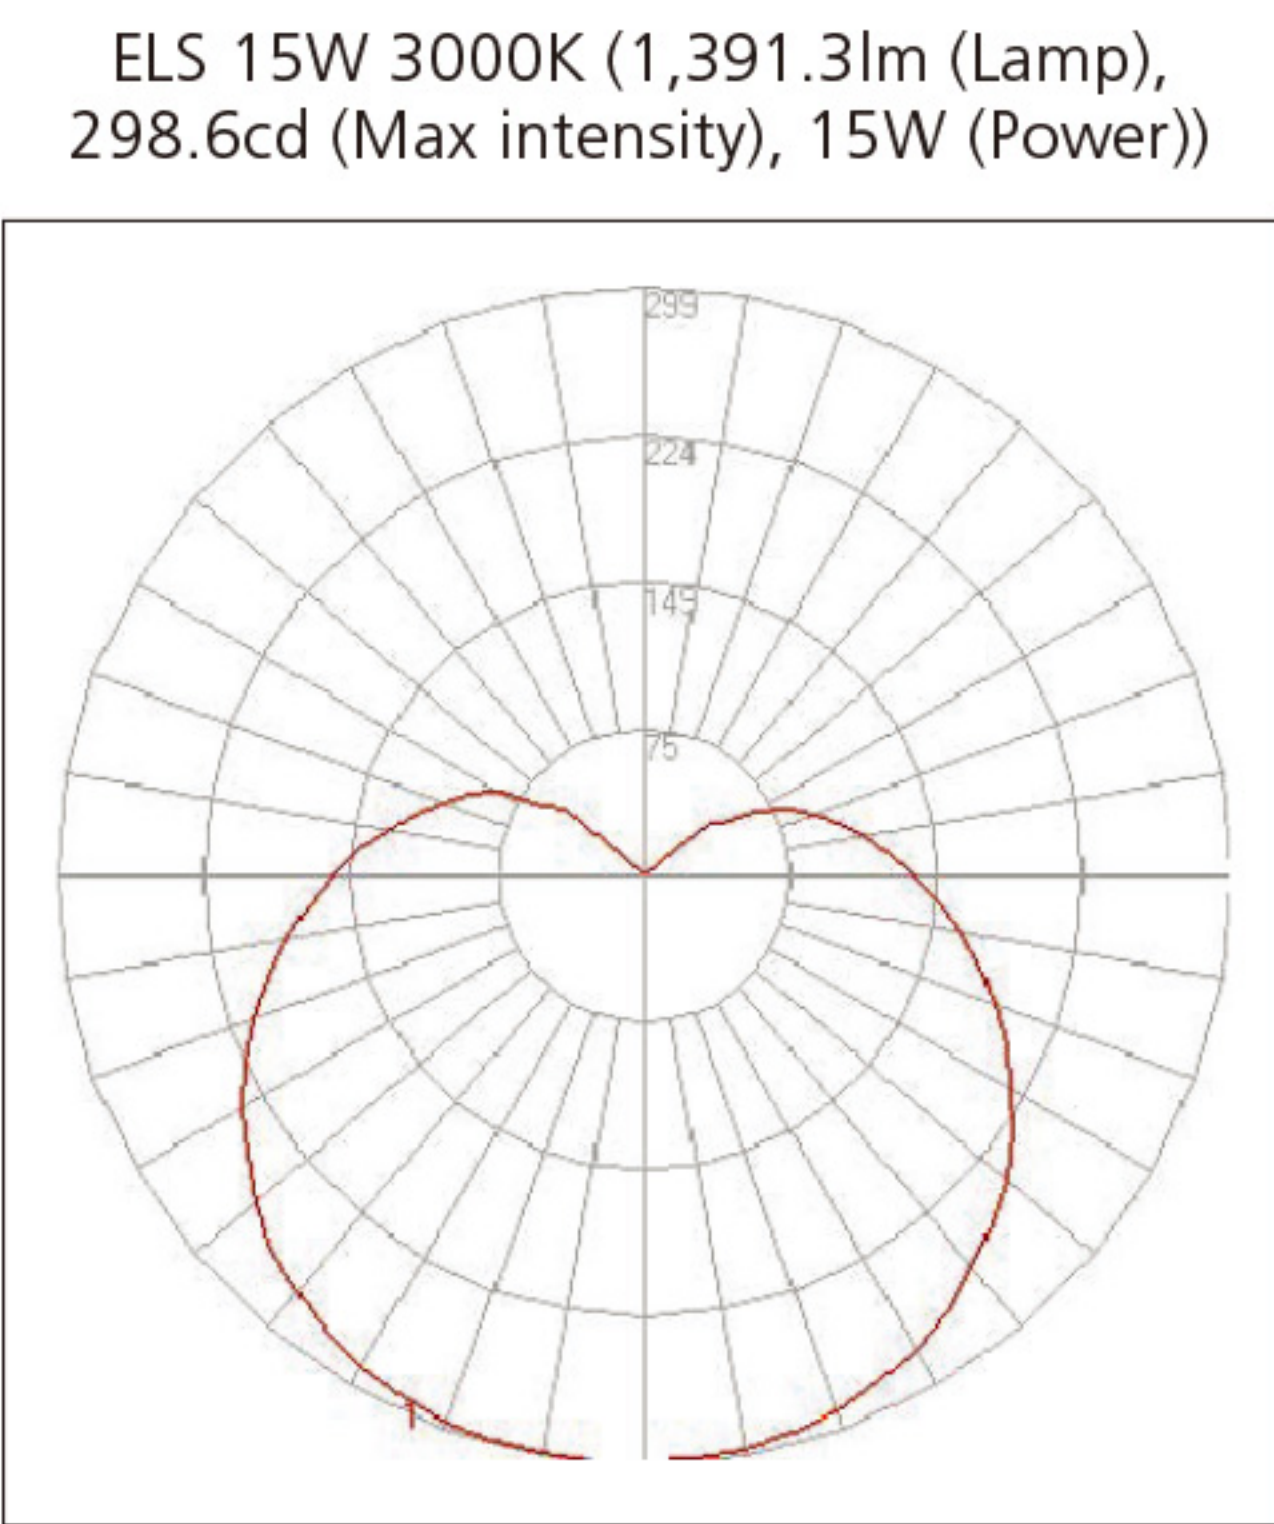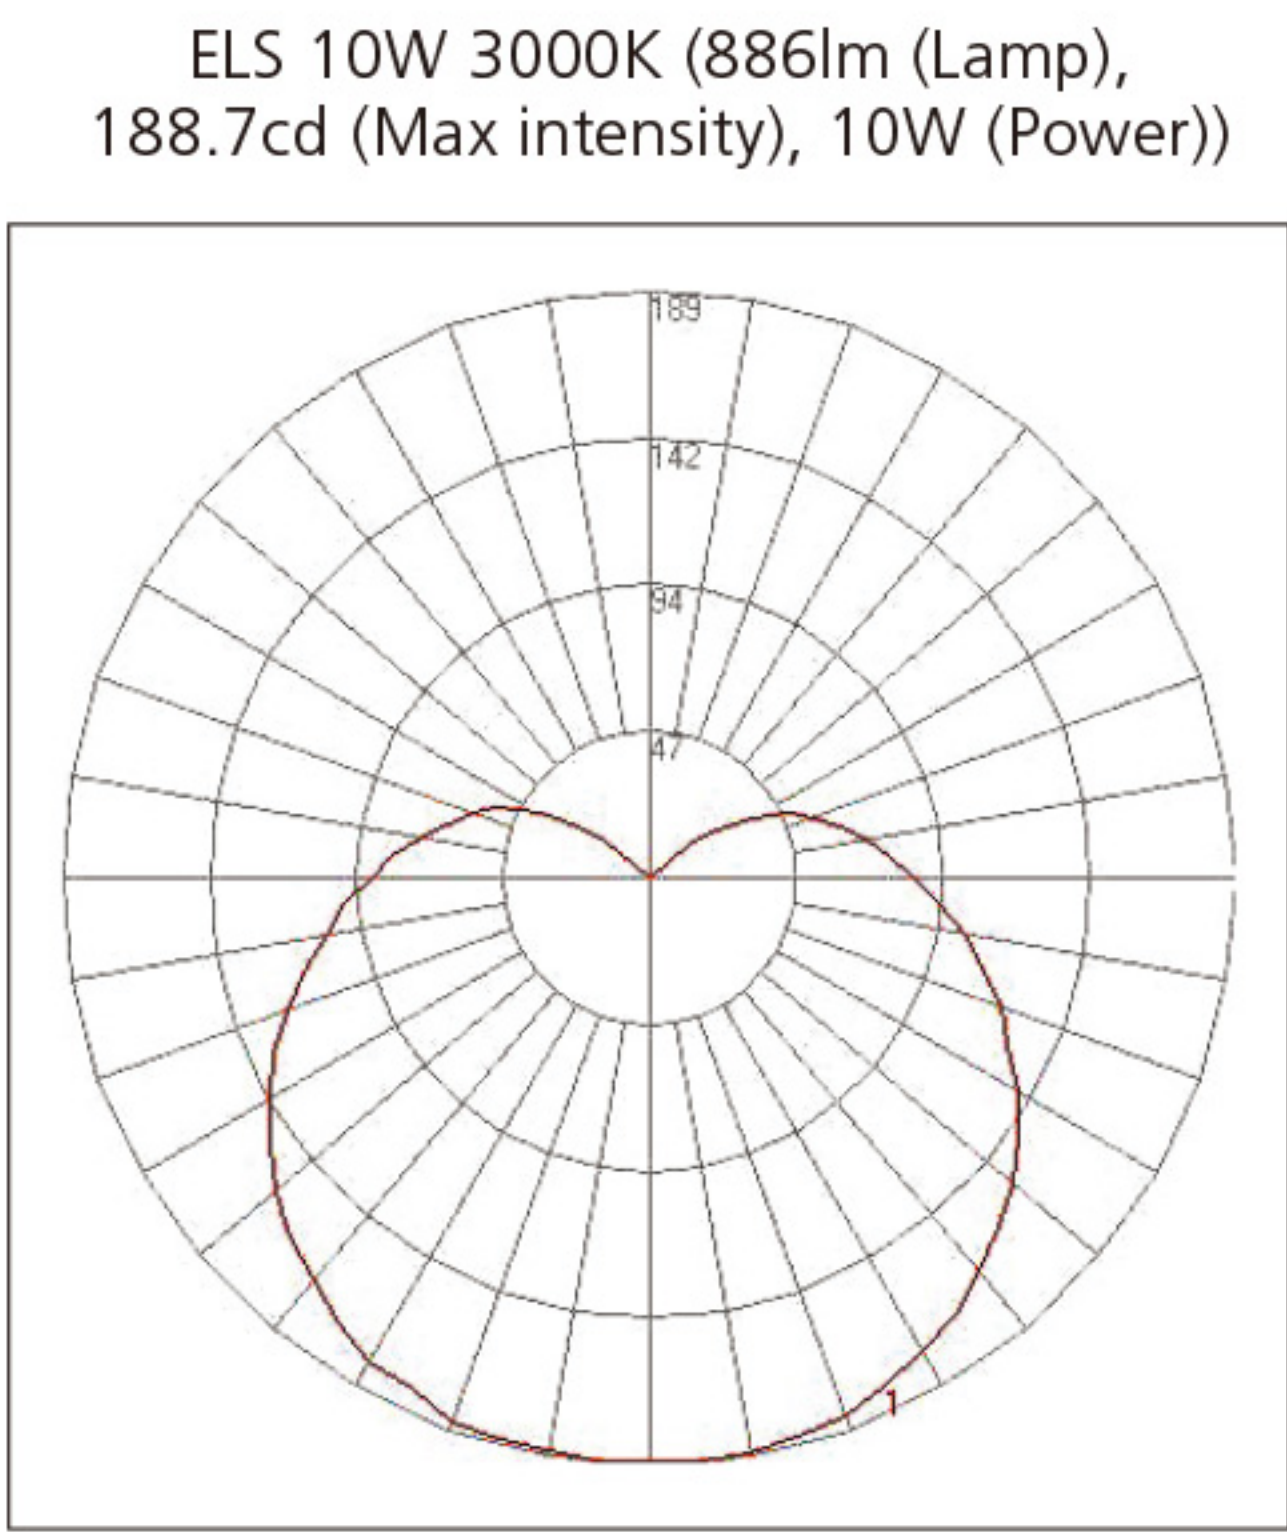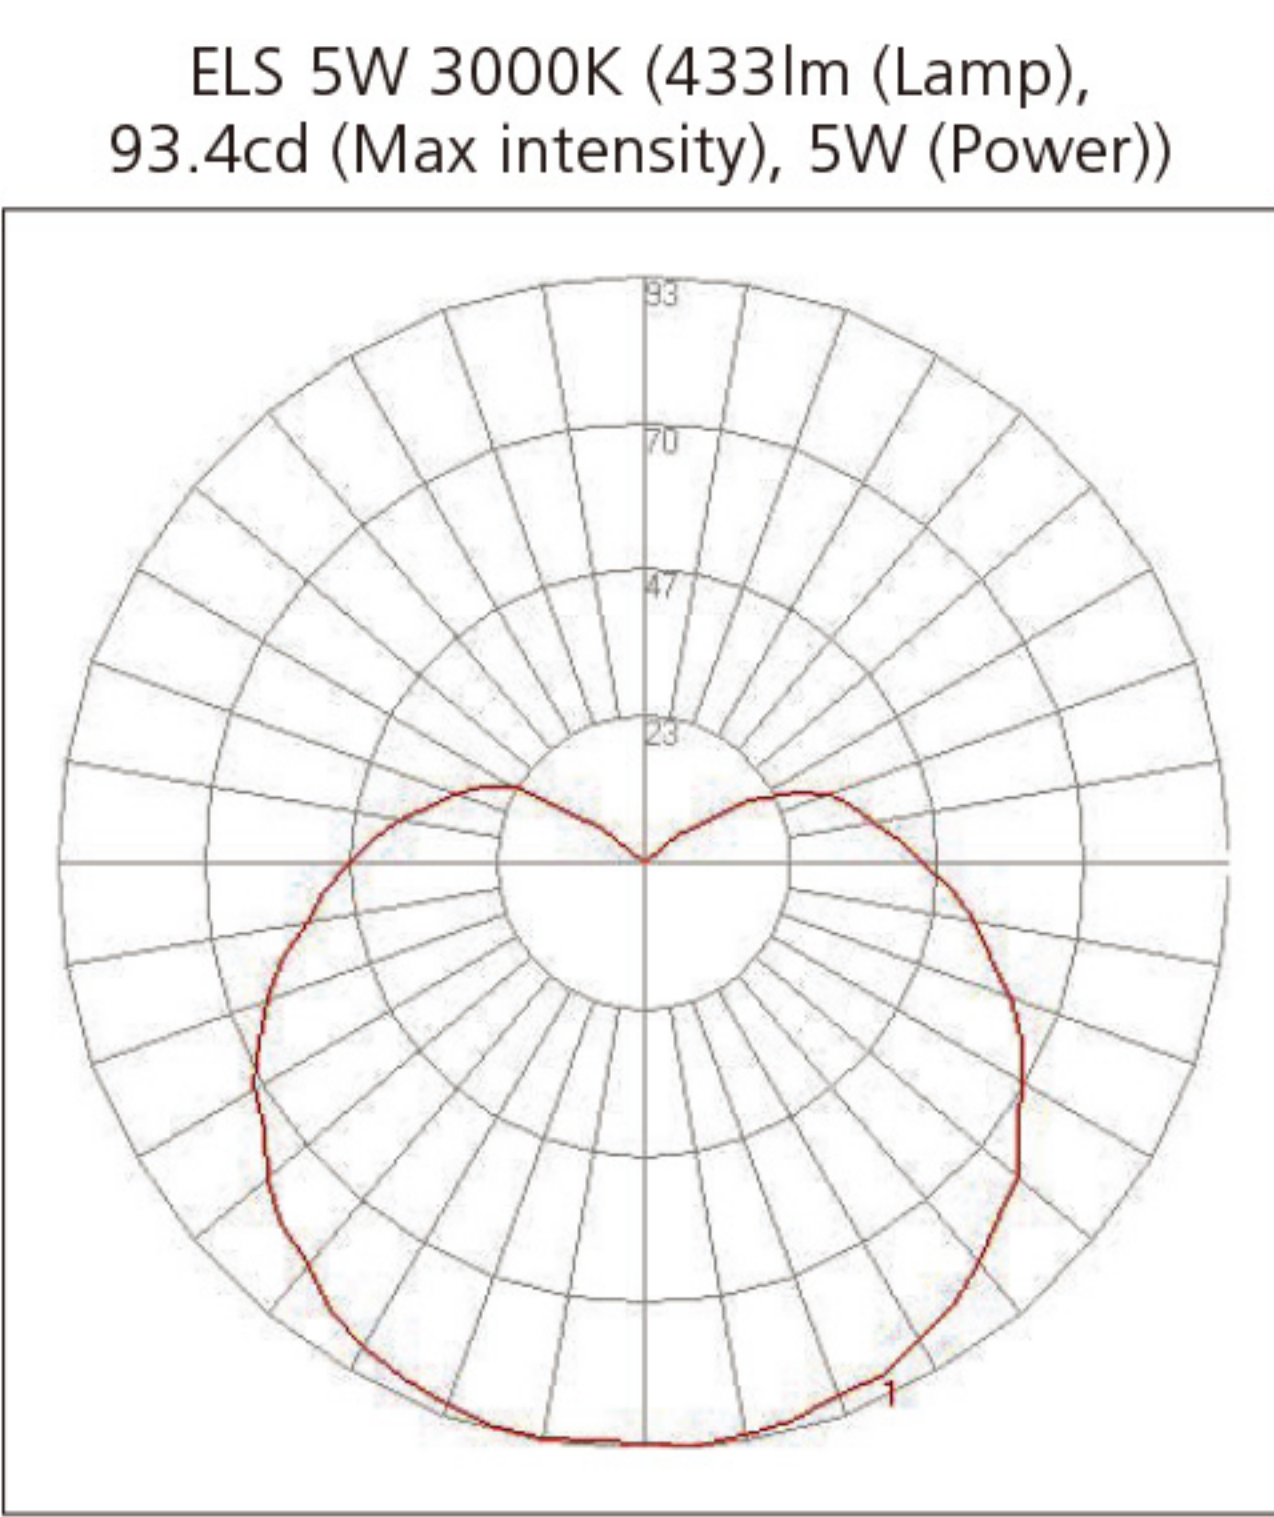





COMPONENTS



- Fixture**
- \_\_\_ ELS5 (color)K-120V
  - \_\_\_ ELS10 (color)K-120V
  - \_\_\_ ELS15 (color)K-120V
  - \_\_\_ ELS20 (color)K-120V

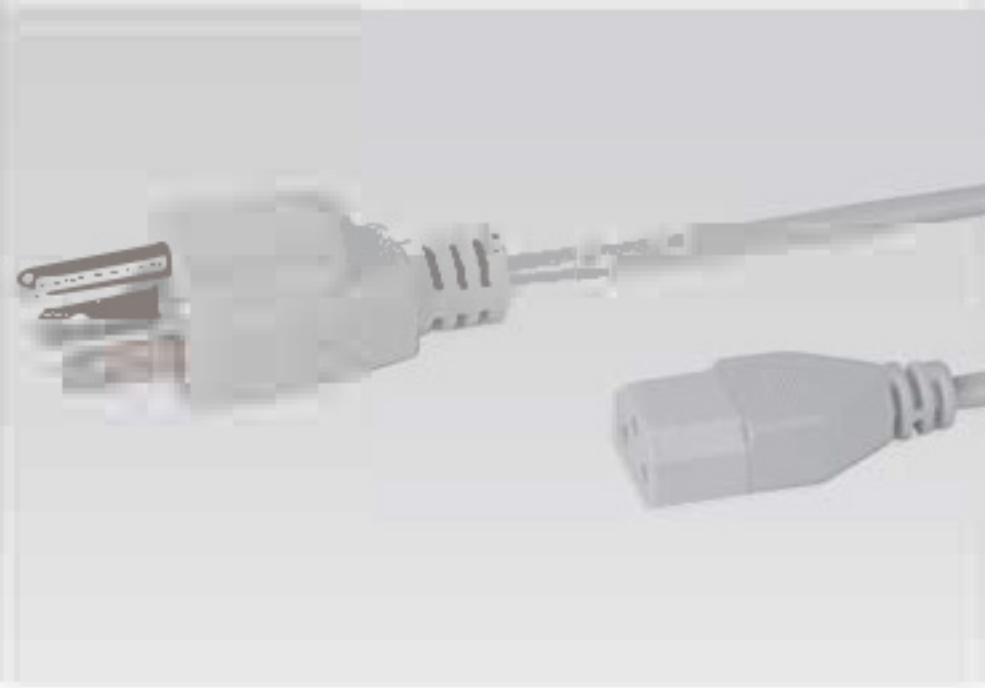


- Power Cord (6')**
- \_\_\_ TUNPC120/XL

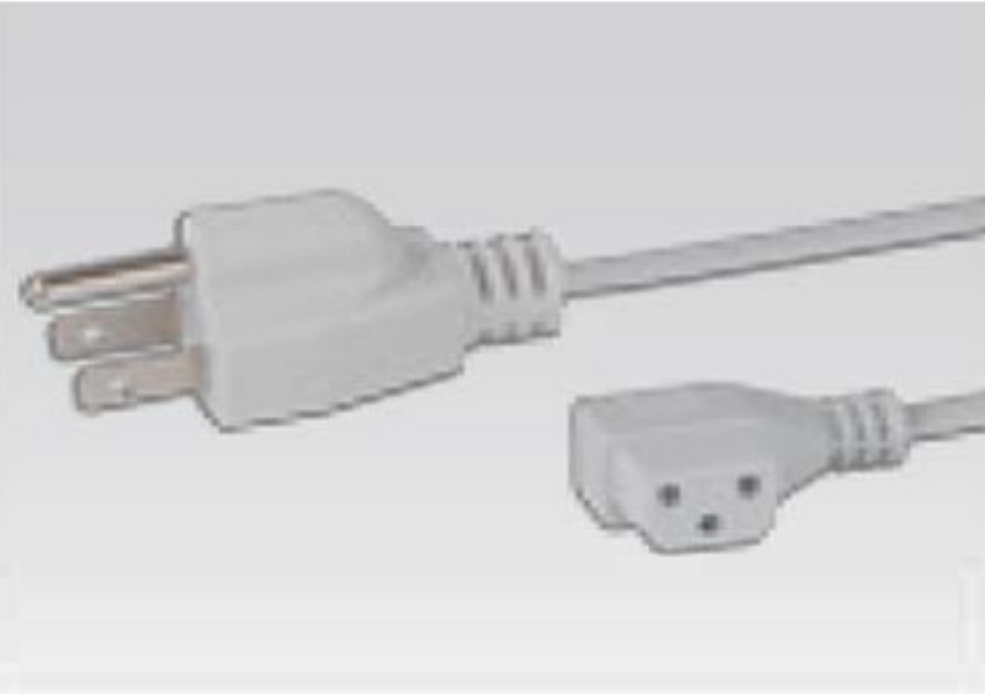

- Power Cord (6')**
- \_\_\_ TUNPC120/SM2/XL



- Jumper Cables**
- \_\_\_ TUNPTC/XL (6')
  - \_\_\_ TUNPTC1/XL (1')
  - \_\_\_ TUNPTC2/XL (2')
  - \_\_\_ TUNPTC4/XL (4')
  - \_\_\_ TUNPTC6/XL (6')

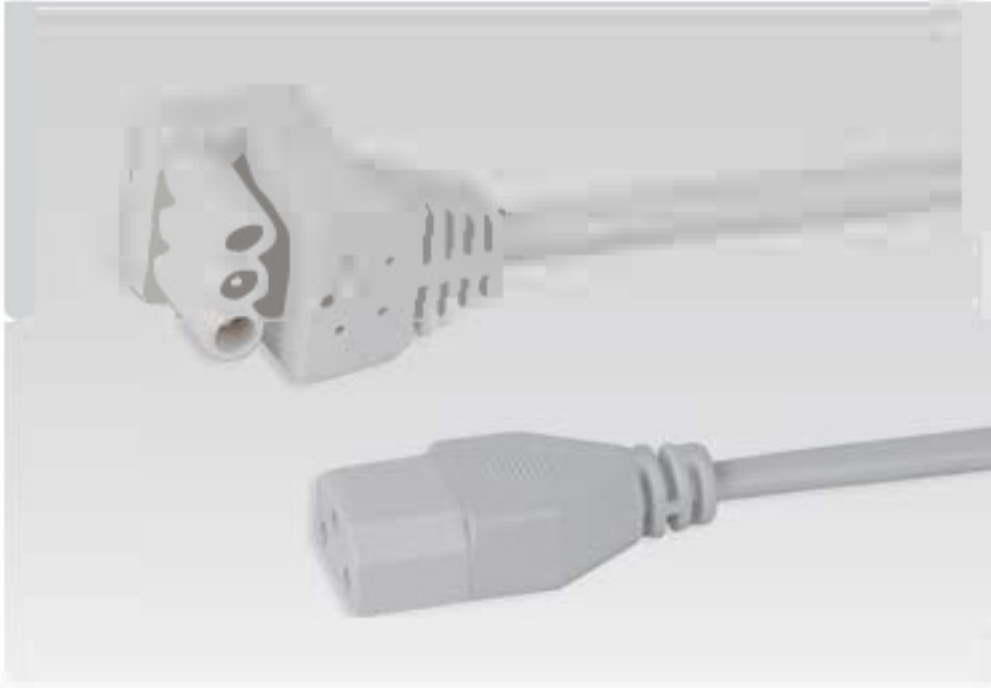

- Interface Cables**
- \_\_\_ ESLTUNPTC/XL (6')
  - \_\_\_ ESLTUNPTC1/XL (1')
  - \_\_\_ ESLTUNPTC2/XL (2')
  - \_\_\_ ESLTUNPTC4/XL (4')
  - \_\_\_ ESLTUNPTC6/XL (6')




- Hard Wire Box**
- \_\_\_ MHWB-ESL



- Connector**
- \_\_\_ TUNCPL/XL
  - Included with fixture



- End Cap**
- \_\_\_ TUN-CAP
  - Included with fixture

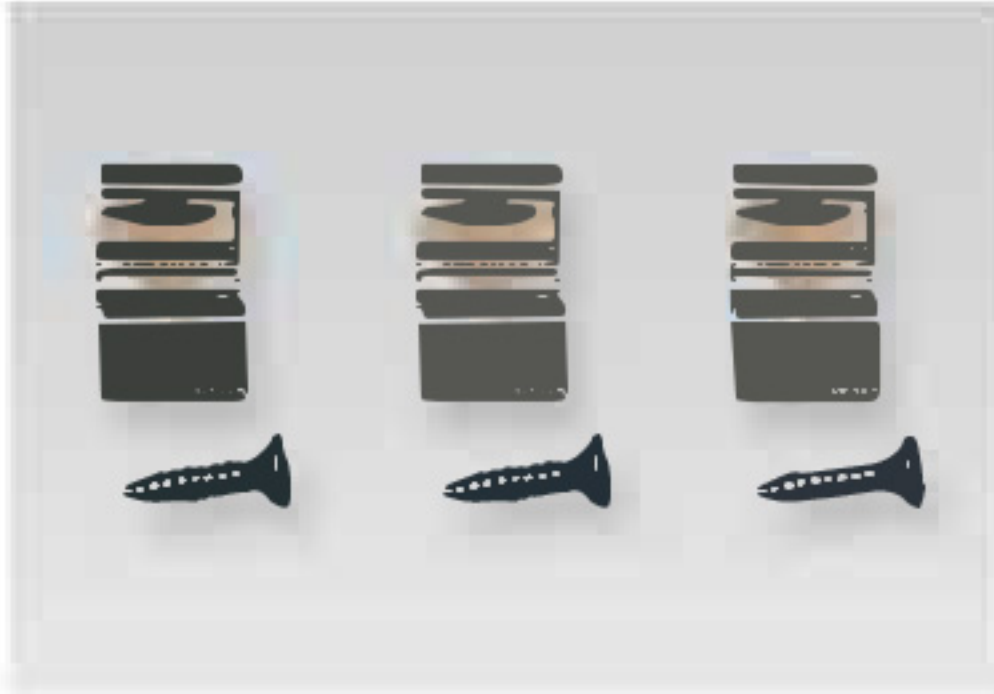

- Mounting Brackets**
- \_\_\_ ELS-BRACKET1
  - Included with fixture

**SPECIFICATION GUIDE:** NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

| MODEL | COLOR                                                               | LENS            | MOUNTING                           | CONFIGURATION             | RUN LENGTH                                                                                 | POWER                                   | ACCESSORIES    | VOLTAGE |
|-------|---------------------------------------------------------------------|-----------------|------------------------------------|---------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------|----------------|---------|
| ELS   |                                                                     | ST              | STD•                               |                           | ft.                                                                                        |                                         | NDM            | 120V    |
| ELS   | 27K -2700K<br>30K -3000K<br>35K -3500K<br>40K -4000K<br>60K -6000K* | ST -Round Milky | STD -<br>Flat Brackets<br>Included | S -Straight<br>V -Varies* | <b>RUN LENGTH IN FEET</b><br>80ft max on single<br>feed. Fill out for every<br>run section | CP -<br>Cable/Plug<br>HW -<br>Hard Wire | NDM<br>Non-Dim | 120V    |

\*Check Factory for Availability

**\*DRAWINGS  
AND RUN  
LENGTH  
REQUIRED**