




PRODUCT FEATURES

- Seamless Illumination. No Dark Spots
- Ultra Slim Profile
- Even Surface Illumination
- Spot Free Lens
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable with 0-10V, Forward/Reverse Phase.
Other Options Available
- Side-Feed Units for Long Continuous Runs
- Quick Ship Available*

PRODUCT SPECIFICATIONS

- 24VDC Constant Voltage Feelux or Approved Class 2 Drivers
- Operating Temperature: 32-113°F (0-45°C)
- Lamp Life: 50,000 hrs / 70%
- Available Color: 2700K, 3000K, 3500K, 4000K
- CRI/Ra > 90
- 74 lm/W - 6.2W/ft - 456lm/ft (HDP Pro 24W 4000K)
- IP20 - Damp Location/Closet Approved
- Beam Angle: 120°
- Finish: Aluminum
- 5 year Warranty
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

DIMENSIONS



FLX Stix HDP Pro 3W 5.7" (145mm)




FLX Stix HDP Pro 6W 11.22" (285mm)



FLX Stix HDP Pro 12W 22.25" (565mm)




FLX Stix HDP Pro 18W 33.27" (845mm)






FLX Stix HDP Pro 24W 44.21" (1123mm)




Model Number	Voltage Input (V)	Power Input (W)	Luminous Flux (lm) / 4000K	Color Rendering	A inches (mm)	B inches (mm)	C inches (mm)
HDP3-(Color)K-24V -C90	DC24	2.9	205	Ra>90	5.51 (140)	5.71 (145)	6.41 (163)
HDP6-(Color)K-24V -C90	DC24	5.7	408	Ra>90	11.02 (280)	11.22 (285)	11.93 (303)
HDP12-(Color)K-24V -C90	DC24	11.5	832	Ra>90	22 (559)	22.23 (565)	22.93 (582)
HDP18-(Color)K-24V -C90	DC24	17.3	1,259	Ra>90	33 (838)	33.21 (844)	33.91 (861)
HDP24-(Color)K-24V -C90	DC24	22.8	1,677	Ra>90	44 (1,118)	44.2 (1,123)	44.92 (1,141)

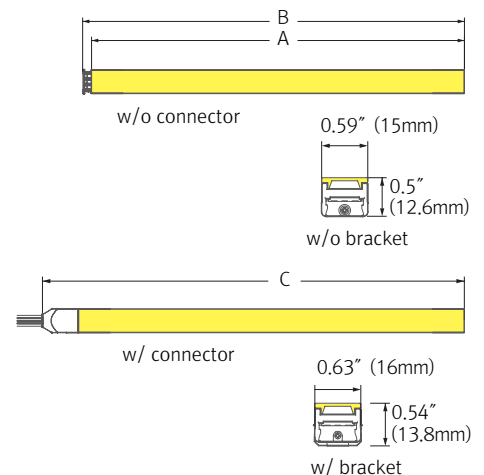


EASY CONECTION






MAGNET

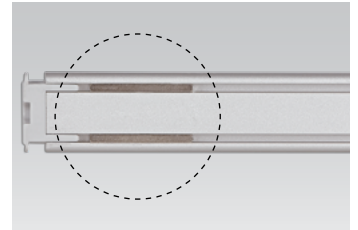


FLEXIBLE CONNECTING FIXTURE




INLINE DIMMER

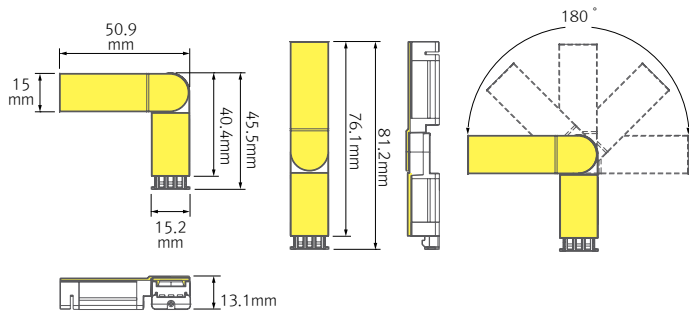




MOUNTING





HDV-BRACKET1




Magnet



HDV-BRACKET2




Standard mounting



LED DRIVER OPTIONS

– Consult factory for additional options.

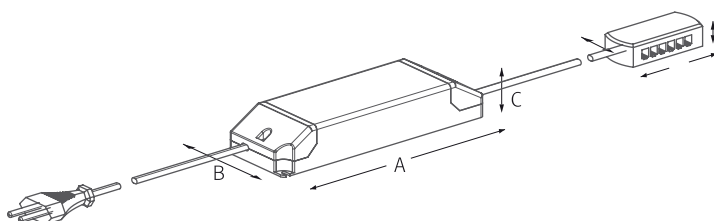


Model Name	A inches (mm)	B inches (mm)	C inches (mm)
FLC30-24V/XL	5.9" (150)	1.6" (41)	1.22" (31)
FLC75-24V/XL	7.08" (180)	2.36" (60)	1.25" (32)
XLD75-124V-FC	11.22" (285)	2.94" (74.7)	1.63" (41.5)
XLD200-224V-FCL-DIM	12.28" (312)	4.46" (113.5)	2.28" (60.5)
XLAV80(L)-124V-SSB	14.4" (366)	4.48" (124)	1.7" (43)


CONNECTION

NO RUN TO EXCEED 75W

IF LONGER RUNS ARE REQUIRED USE SIDE FEED UNIT HDP3-(COLOR)K-24V-S TO CONTINUE SEAMLESS LIGHTING. NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

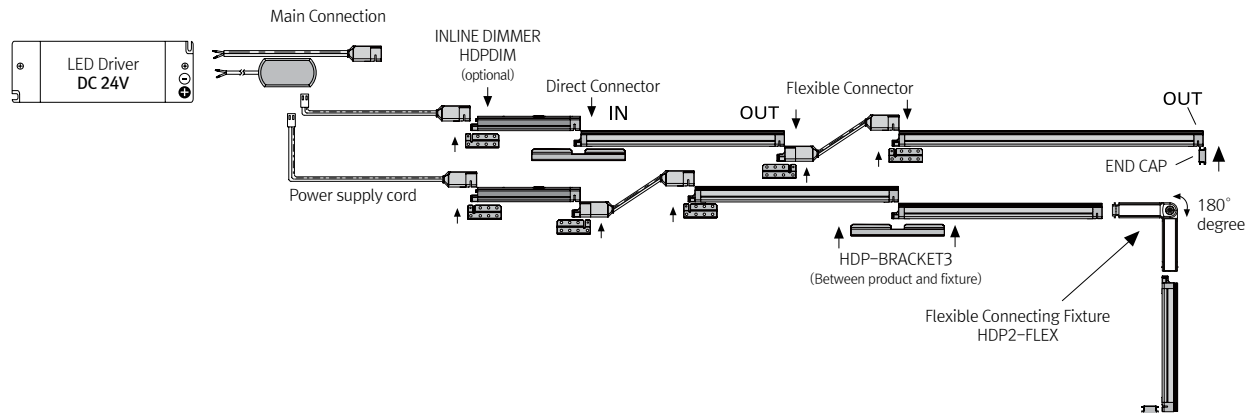


SIDE FEED UNIT

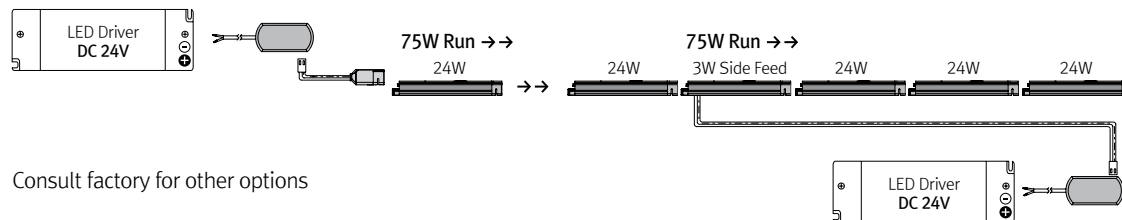


BEAM SPREADS


HDPPro 3W 4000K




HDPPro 6W 4000K




HDPPro 12W 4000K




HDPPro 18W 4000K



HDPPro 24W 4000K



COMPONENTS




Power cable
 __ HDPPC (8')
 __ HDPPC (13')



Sidefeed for Seamless Extension (3W)
 __ HDP3-(color)K-24V-S



Flexible Connecting Fixture (2W)
 __ HDP2-(color)K-24V-Flex



Flexible Connecting Cable
 __ HDPPTC (6')
 __ HDPPTC1 (1')
 __ HDPPTC2 (2')
 __ HDPPTC4 (4')
 __ HDPPTC6 (6')




In-Line Dimmer
 __ HDPDIM
 (Max 75W in a row)




Occupancy Sensor
 __ HDP-OSM
 HDP Occupancy Sensor
 Inline Module




Touch Switch
 __ HDPTS
 HDP ON/OFF touch switch



End Cap
 __ HDP-CAP
 Included with fixture



Metal Mounting Brackets
 __ HDP-BRACKET1
 Included with fixture



Angled Brackets
 Angled 15 ° /40 ° (BK2)
 __ HDP-BRACKET2
 Optional



Connecting Brackets
 Fixture to Fixture
 __ HDP-BRACKET3
 Included with fixture



Dimming Interface
 Max. 100W (100W/CH, 1CH)
 0-10V Signal
 __ FDC-L10




Door and motion sensor
 __ FLS-M24V



Occupancy sensor
 __ FLS-P24V



12 Port Hub
 __ D12P-HUB
 Included with Cord and Plug drivers. Order separately for Hard Wire or 3rd Party Drivers



LED Drivers
 with distributor and power cord (1800mm)
 __ FLC30-24V/XL
 __ FLC75-24V/XL



Hard Wire Driver
 (90V to 300V)
 __ XLAV80(L)-124V-SSB
 __ XLD200-224V-FCL-DIM
 __ XLD75-124V-FC



Justin Drivers
 __ 481-24DCR
 __ 483-24DCR-277
 __ 961-24DCR
 __ 963-24DCR-277
 __ C2240-24DCR
 __ C2240-24DCR-277

A larger selection of drivers are available including remote and hard wire drivers. Please consult factory.

SPECIFICATION GUIDE

NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

MODEL	COLOR	C90	LENS	MOUNTING	CONFIGURATION	RUN LENGTH	DRIVER	CONTROLS	VOLTAGE
HDP Pro		C90				ft.			
HDP Pro	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 60K - 6000K*		SF - Spot Free	STD Flat Brackets Magnets Included BK2 15 ° /40 ° Brackets	S - Straight V - Varies*	RUN LENGTH IN FEET Fill out for every run section *DRAWINGS AND RUN LENGTH REQUIRED	CP - Cable/Plug HW - Hard Wire TD - 3rd Party Drivers Consult Factory	NDM Non-Dim IDM Inline Dim FDC 0-10V Interface FPH Forward Phase RPH Reverse Phase	100V 120V 230V 277V

* Available, consult Feelux Lighting

NOTE: No Run to Exceed 75W without use of Side Feed Unit

* Consult HDP Installation instructions for more information