





PRODUCT FEATURES

- Compatible with MonoRail system
- Slide and swivel LED spotlight
- Simple Plug and Play connection to the power track
- Available in silver, black
- Dimmable with available accessories

PRODUCT SPECIFICATIONS

- Voltage: DC 24V
- Operating temperature: 32–113°F (0–45°C)
- Lamp Life: 50,000hr / 70%
- Available color : 2700K, 3000K, 3500K, 4000K
- CRI/Ra>85
- Lumen Output: 195
- Degree of protection: IP20
- Beam Angle: 45°(STD), 25°, 60° available lens options
- Total energy consumption of 2.6W

INSTALLATION

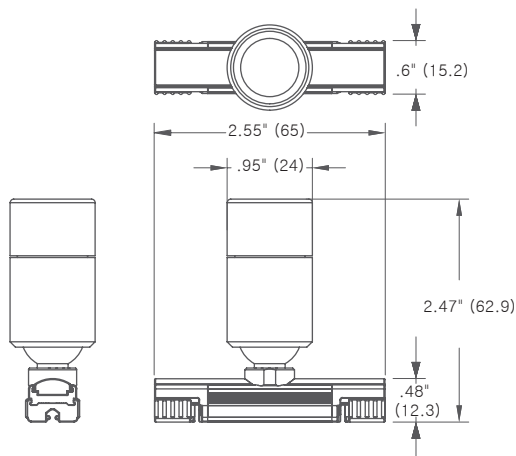

Put MonoRail Spot HO on installed MNR-Rail

LOOSEN LENS CAP, AIM, AND TIGHTEN

SPECIFICATION GUIDE NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

MODEL	COLOR	LENS	MOUNTING	FINISH	DRIVER	CONTROLS	VOLTAGE
MRS3		STD	MONORAIL				120V
	27K –2700K 30K –3000K 35K –3500K 40K –4000K			BK –Black SV –Silver	CP – Cable/Plug HW – Hard Wire TD – 3rd Party Drivers Consult Factory	NDM Non-Dim IDM Inline Dim FDC 0–10V Interface FPH Forward Phase RPH Reverse Phase	

For all other MonoRail System components please refer to MonoRail and MonoRail Pro specification sheets