

PRODUCT FEATURES

- Line Voltage 100–120V – No Driver Required
- Easy and Quick Snap Connection
- Innovative Slim Design
- Seamless and Spot Free
- Line Voltage Phase Dimming
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

Release
 2020 : 220 – 240V for Global Applications
 2021 : 120V, 277V for North American Applications


PRODUCT SPECIFICATIONS

- Voltage : AC 100–120V
- Operating Temperature : 32–113°F (0–45°C)
- Lamp Life : 55,000hr / 70%
- Available Color : 2700K, 3000K, 3500K, 4000K
- Color Rendering : CRI>90
- 5 year warranty


MAX. CONNECTION

- 400W in one row (single power feed)


DIMENSIONS




NDF3 / FLX Stix NDFree 3W length 6.1" (156mm)




NDF5 / FLX Stix NDFree 5W length 11.5" (291.5mm)



NDF10 / FLX Stix NDFree 10W length 22.4" (569.5mm)





NDF15 / FLX Stix NDFree 15W length 33.4" (848mm)




NDF20 / FLX Stix NDFree 20W length 44.3" (1,126mm)



| Model Number | Voltage Input (V) | Lamp Power (W) | Lumens(lm) (CRI90) | A inches (mm) | B inches (mm) | C inches (mm) | D inches (mm) | E inches (mm) | F inches (mm) | G inches (mm) |
|-------------------------|-------------------|----------------|--------------------|---------------|---------------|----------------|---------------|---------------|---------------|---------------|
| NDF3-(Color)K-120V-C90 | AC 100-120V | 2.5 | 212 | 5.8 (147) | 6.1 (156) | 7 (178.7) | 0.75 (19) | 0.71 (18) | 0.71 (18) | 0.66 (16.8) |
| NDF5-(Color)K-120V-C90 | AC 100-120V | 5.34 | 340 | 11.1 (282.5) | 11.5 (291.5) | 12.4 (314) | 0.75 (19) | 0.71 (18) | 0.71 (18) | 0.66 (16.8) |
| NDF10-(Color)K-120V-C90 | AC 100-120V | 10.93 | 720 | 22 (560.5) | 22.4 (569.5) | 23.3 (592) | 0.75 (19) | 0.71 (18) | 0.71 (18) | 0.66 (16.8) |
| NDF15-(Color)K-120V-C90 | AC 100-120V | 16.08 | 1,080 | 33 (839) | 33.4 (848) | 34.3 (870.5) | 0.75 (19) | 0.71 (18) | 0.71 (18) | 0.66 (16.8) |
| NDF20-(Color)K-120V-C90 | AC 100-120V | 21.3 | 1,440 | 43.4 (1,117) | 44.3 (1,126) | 45.2 (1,148.5) | 0.75 (19) | 0.71 (18) | 0.71 (18) | 0.66 (16.8) |

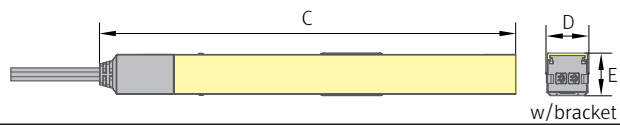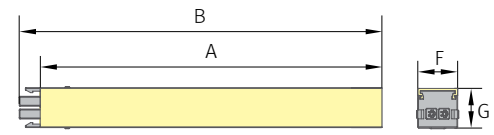

BEAM SPREADS

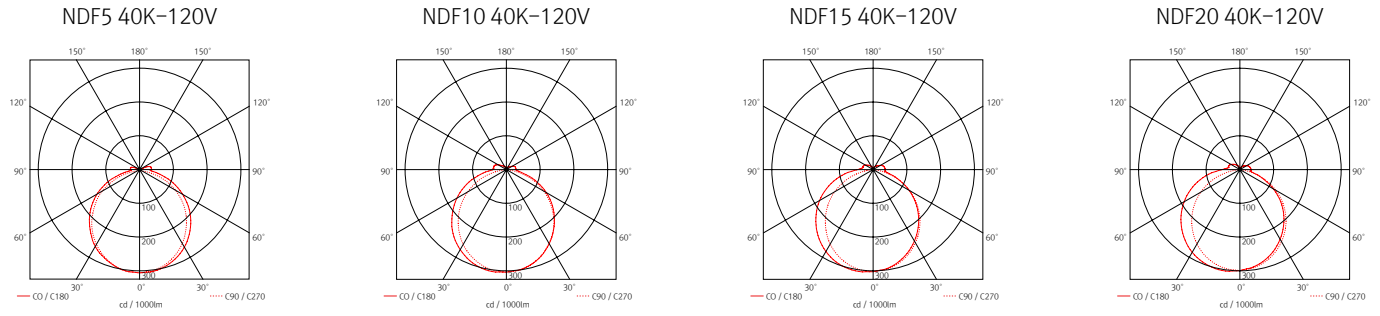


EASY CONECTION




MAGNET

INSTALLATION


☆Before Installation(Power Connection)

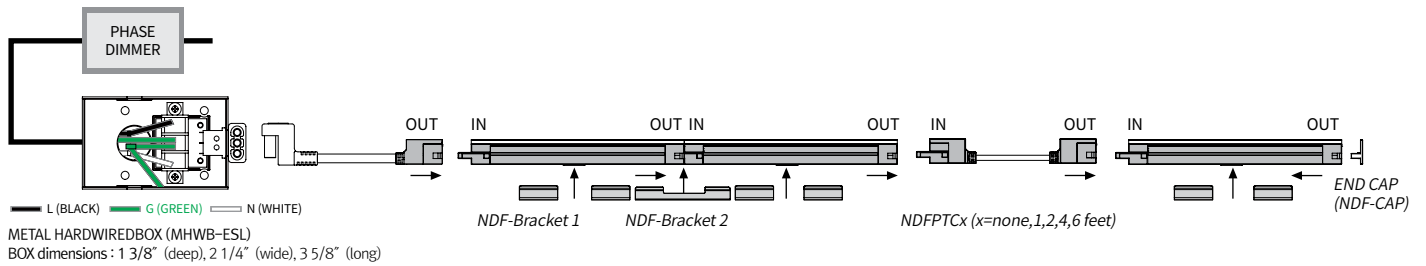


☆After Installation

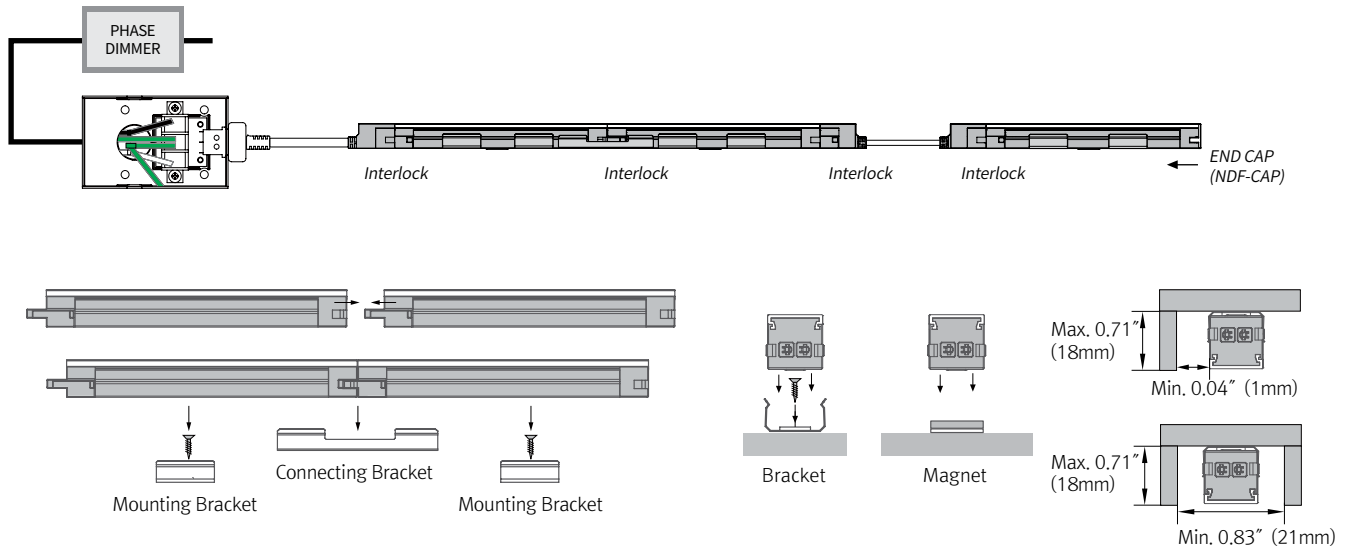


COMPONENTS



LED Power connector
 __NDF3-(Color)K-120V-PC
 NDF3 (5.8") fixture with
 6' power cord




Connecting Cable
 __NDFPTC/XL (6")
 __NDFPTC1/XL (1')
 __NDFPTC2/XL (2')
 __NDFPTC4/XL (4')
 __NDFPTC6/XL (6')




Connecting bracket
 __NDF-BRACKET3
 Included with fixture




LED open power connector
 __NDF3-(Color)K-120V-OPC
 NDF3 (5.8") fixture with
 6' open power cord



Interface Cable
 __ESLNDFTPCTC/XL (6")
 __ESLNDFTPCT1/XL (1')
 __ESLNDFTPCT2/XL (2')
 __ESLNDFTPCT4/XL (4')
 __ESLNDFTPCT6/XL (6')



End Cap
 __NDF-CAP
 Included with fixture




Power Cord
 __NDFPC/XL (6')



Mounting Bracket
 __NDF-BRACKET1
 Included with fixture



Hard Wire Box
 __MHWB-ESL



Open Power Cord
 __NDFOPC/XL (6')



Angle bracket
 __NDF-BRACKET2