



PRODUCT FEATURES

- Seamless Spot Free Illumination
- Exterior IP66 Rating
- Ultra Slim Profile
- Easy Installation
- 0-10V or Phase Dimming Available
- Quick Ship*

PRODUCT SPECIFICATIONS


- Voltage: DC 24V
- Operating Temperature: -4°F –113°F (-20°C – 45°C)
- Lamp Life: 50,000hrs / 70%
- Available Color: 3000K, 4000K (RGB available, special order)
- Color Rendering: Ra>85
- Energy Efficiency: 85 lm/W
- Degree of Protection: IP66

* Pending factory availability




DIMENSIONS


Model Name	Power Input (V)	Lamp Power (W)	A inches (mm)	B inches (mm)	C inches (mm)
ODV3-(color)K-24V	DC24	2.9	5.5" (140.4)	.6" (15)	.87" (22.1)
ODV6-(color)K-24V	DC24	5.8	11" (280.5)	.6" (15)	.87" (22.1)
ODV12-(color)K-24V	DC24	11.6	22" (560)	.6" (15)	.87" (22.1)
ODV18-(color)K-24V	DC24	17.4	33" (839)	.6" (15)	.87" (22.1)

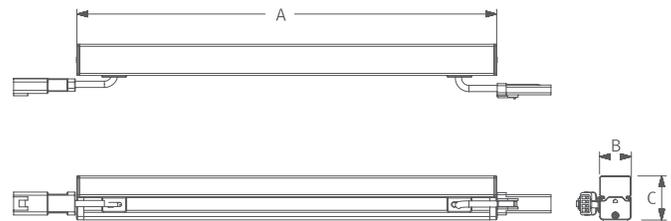


EASY CONNECTION

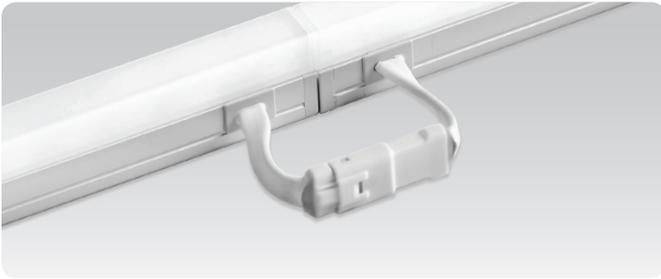


BEAM SPREADS




ODV 3W 4000K (241.5lm (Lamp), 102.2cd (Max intensity), 3W (Power))



ODV 6W 4000K (490.3lm (Lamp), 204.7cd (Max intensity), 6W (Power))



ODV 12W 4000K (963lm (Lamp), 400.8cd (Max intensity), 11W (Power))



ODV 18W 4000K (1,327.8lm (Lamp), 566.3cd (Max intensity), 17W (Power))

CONNECTION

NO RUN TO EXCEED 75W


SEAMLESS LIGHTING. NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

Model Name	Max. Units for LED Driver			
	24V/15W	24V/30W	24V/75W	24V/200W
ODV3 40K-24V	5	10	25	66
ODV6 40K-24V	2	5	12	33
ODV12 40K-24V	1	2	6	16
ODV18 40K-24V	—	1	4	11

COMPONENTS




- FLX Stix ODV**
Between FLX Stix ODV & FLX Stix ODV
- ___ ODV3-(color)K-24V (3W)
 - ___ ODV6-(color)K-24V (6W)
 - ___ ODV12-(color)K-24V (12W)
 - ___ ODV18-(color)K-24V (18W)



- Connecting Cable**
- ___ ODVPTC 6" (150mm)
 - ___ ODVPTC1 1' (300mm)
 - ___ ODVPTC2 2' (600mm)
 - ___ ODVPTC4 4' (1200mm)
 - ___ ODVPTC6 6' (1800mm)



- Power Cable**
- ___ ODVPC
 - ___ ODVPC(4M)
 - ___ ODVPC(6M)



- Mounting Bracket**
- ___ ODV-BRACKET
- Included in fixture



- End Cap**
- ___ ODV-CAP
- Included in fixture

A larger selection of drivers are available including remote and hard wire drivers. Please consult factory.



- LED Drivers**
 with distributor and power cord (1800mm)
- ___ FLC30-24V/XL
 - ___ FLC75-24V/XL



- Hard Wire Driver**
IP65, Nema 3R
Indoor/Outdoor
 (90V to 300V)
- ___ XLAV80(L)-124V-SSB
 - ___ XLD200-224V-FCL-DIM
 - ___ XLD75-124V-FC



- Justin Drivers**
Nema 3R
Indoor/Outdoor
- ___ 481-24DCR
 - ___ 483-24DCR-277
 - ___ 961-24DCR
 - ___ 963-24DCR-277
 - ___ C2240-24DCR
 - ___ C2240-24DCR-277



- 12 Port Hub**
- ___ D12P-HUB
- Included with Cord and Plug drivers. Order separately for Hard Wire or 3rd Party Drivers



- Dimming Interface (0-10V)**
- ___ FDC-L10 (Max.100W)
- (where required)

SPECIFICATION GUIDE: NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

MODEL	COLOR	MOUNTING	CONFIGURATION	RUN LENGTH	DRIVER	CONTROLS	VOLTAGE
ODV				ft.			
ODV	30K -3000K 40K -4000K	STD Flat Brackets Included BK2 15/40 degree Bracket	S -Straight V -Varies*	RUN LENGTH IN FEET Fill out for every run section *DRAWINGS AND RUN LENGTH REQUIRED	CP - Cable/Plug HW - Hard Wire TD - 3rd Party Drivers Consult Factory	NDM Non-Dim IDM Inline Dim FDC 0-10V Interface FPH Forward Phase RPH Reverse Phase	DC 24V