


PRODUCT FEATURES

- Aluminum body with rotating top bar
- Easy assembly with NDPro fixture
- Various length available
- Ideal for showcase or exhibition

DIMENSIONS

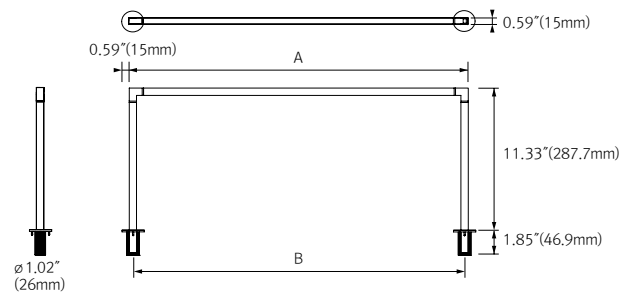


FLX Stix NDPro Fixture	Lamp Power	Luminous Flux (4000K)	A (Top Length)	B (Recommended Distance for Mounting Holes)
NDP4 40K-24V-C90	4W	300 lm	15.6"(396.5mm)	15"(381mm)
NDP7 40K-24V-C90	7W	570 lm	26.6"(676.5mm)	26"(661mm)
NDP11 40K-24V-C90	11W	860 lm	37.6"(955.5mm)	37"(940mm)
NDP15 40K-24V-C90	15W	1,210 lm	48.6"(1234.5mm)	48"(1219mm)




INSTALLATION

Step.1

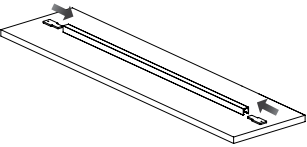


1. Place the Top Bar onto the deck.
2. Insert the hole guides into both ends of Top Bar.

Step.2

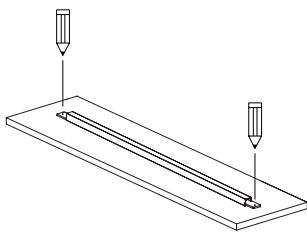


1. Mark the hole to determine the location to drill.

Step.3

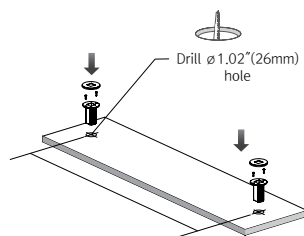


1. Drill $\varnothing 26\text{mm}$ holes to insert Mounting Base.
2. Fix Mounting Base with screws and attach Mounting Base Cover on top.

Step.4

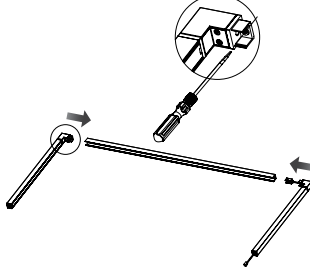


1. Connect Top Bar with Side Pole and Power Pole on each side.
2. Tighten the screw on both Side Pole and Power Pole for assembly stability.

Step.5

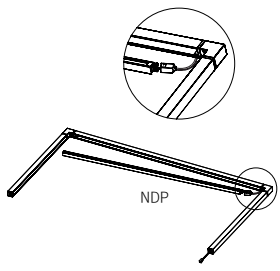


1. Connect NDPro fixture to power cable from Power Pole.

Step.6

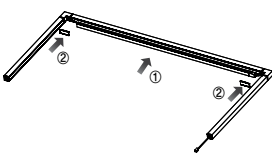


1. Mount NDPro fixture on Top Bar with magnets.
2. Push and insert Fix Cover to cover both ends for clean look.

Step.7

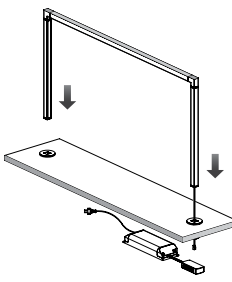


1. Insert Side Pole and Power Pole onto Mounting Base Cover.
2. Connect power cord from Power Pole to FLC30/FLC75 LED driver.

Step.8



1. Rotate Top Bar to desired position and check NDPro lighting fixture is on and functioning properly.

Required Accessories

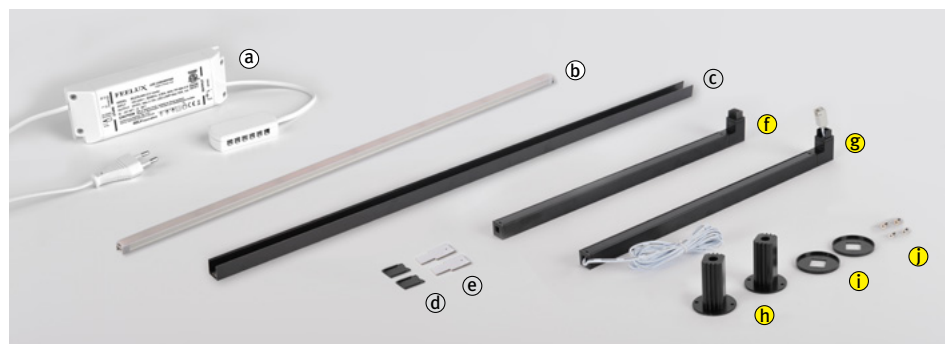


- Ⓐ LED Driver
 - Ⓑ FLX Stix NDPro
 - Ⓒ Top Bar
 - Ⓓ Fix Cover
 - Ⓔ Hole guide
 - Ⓕ Side Pole
 - Ⓖ Power Pole
 - Ⓗ Mounting Base
 - Ⓘ Mounting Base Cover
 - Ⓢ Screw
- NDP Showcase Arm Top Bar

NDP Showcase Arm Kit


* Item Ⓐ Ⓑ are sold separately

BEAM SPREADS


NDP4 40K-24V-C90
75.32 lm/W
270.40 lm

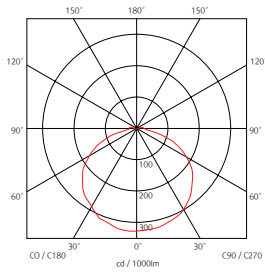


NDP7 40K-24V-C90
74.59 lm/W
531.00 lm

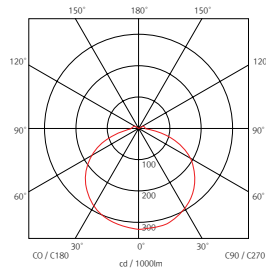

NDP11 40K-24V-C90
74.75 lm/W
797.05 lm

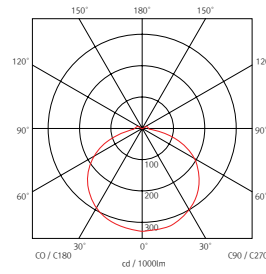

NDP15 40K-24V-C90
75.26 lm/W
1078.47 lm

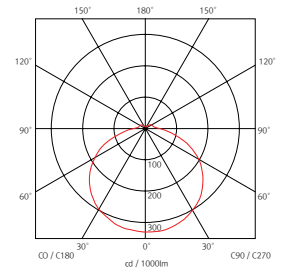

COMPONENTS



NDP Showcase Arm Kit
__ NDP-SA-Kit



NDP Showcase Arm Top Bar
__ NDP4-SA-Kit-TB
__ NDP7-SA-Kit-TB
__ NDP11-SA-Kit-TB
__ NDP15-SA-Kit-TB



NDPro Fixture
__ NDP4-(color)K-24V
__ NDP7-(color)K-24V
__ NDP11-(color)K-24V
__ NDP15-(color)K-24V



LED Driver
__ FLC30-24V
__ FLC75-24V