

DATE **PROJECT** **TYPE**



PRODUCT FEATURES

- Easy slide connecting system
- Slim design with seamless lighting
- Integral driver
- Round diffuser (Square also available)
- Slide-Up Replacing System
- Easy Plug-and-Play Installation
- Quick Ship Available


PRODUCT SPECIFICATIONS

- Voltage : AC 100~240V
- Operating Temperature : 32-113°(0-45°C)
- Lamp Life : 40,000 hrs L70
- Available Color : 2700K, 3000K, 3500K, 4000K
- CRI/Ra >90
- Energy Efficiency : 103.3lm/W - 5.2W/ft - 539.6lm/ft
- Product is approved for Closet / Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification
- Degree of protection IP20 / Beam Angle : 170°
- Finish : White
- Max.connection(Non dimming) : 400W
5W(80pcs), 10W(40pcs), 15W(26pcs), 20W(20pcs)
- 5 year Warranty



Model Name	Input (V)	Power (W)	Luminous Flux	Luminous Efficacy	Color Rendering	Operating Temperature	Dimming
SSL3 40K-UNV-C90	AC 100~240V	2.3W	180 lm	83 lm/W	CRI > 90	32-113 F	Non-Dimming
SSL5 40K-UNV-C90	AC 100~240V	5.2W	488 lm	95 lm/W	CRI > 90	32-113 F	Non-Dimming
SSL10 40K-UNV-C90	AC 100~240V	9.7W	982 lm	101 lm/W	CRI > 90	32-113 F	Non-Dimming
SSL15 40K-UNV-C90	AC 100~240V	14.9W	1,528 lm	102 lm/W	CRI > 90	32-113 F	Non-Dimming
SSL20 40K-UNV-C90	AC 100~240V	19.9W	2,056 lm	103 lm/W	CRI > 90	32-113 F	Non-Dimming


MODEL SELECTION KEY

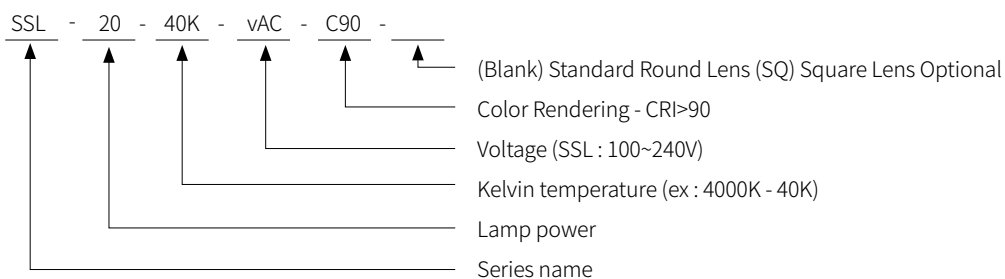

Square Lens Optional


SPECIFICATION GUIDE

NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

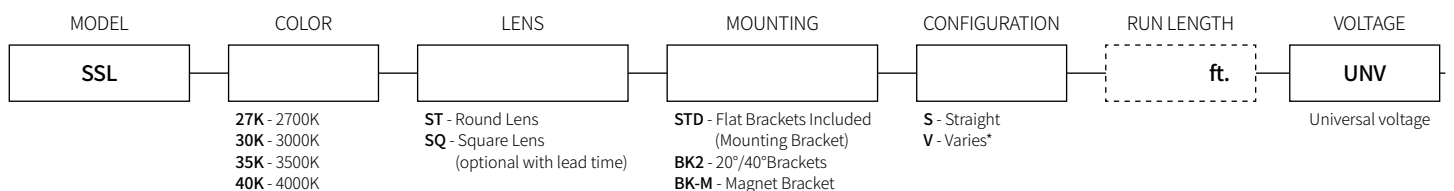


DIMENSION






* Standard type (Round diffuser)




* Optional type (Square diffuser)



Model Number	Dimensions for round lens / square lens		
	A	B	C
SSL3 XXK-UNV-C90	5.9" (150mm)	1.27" (32.3mm)	1.39" (35.2mm)
SSL5 XXK-UNV-C90	12.59" (320mm)	1.27" (32.3mm)	1.39" (35.2mm)
SSL10 XXK-UNV-C90	22.83" (580mm)	1.27" (32.3mm)	1.39" (35.2mm)
SSL15 XXK-UNV-C90	34.25" (870mm)	1.27" (32.3mm)	1.39" (35.2mm)
SSL20 XXK-UNV-C90	45.67" (1160mm)	1.27" (32.3mm)	1.39" (35.2mm)




SLIDE CONNECTION SYSTEM

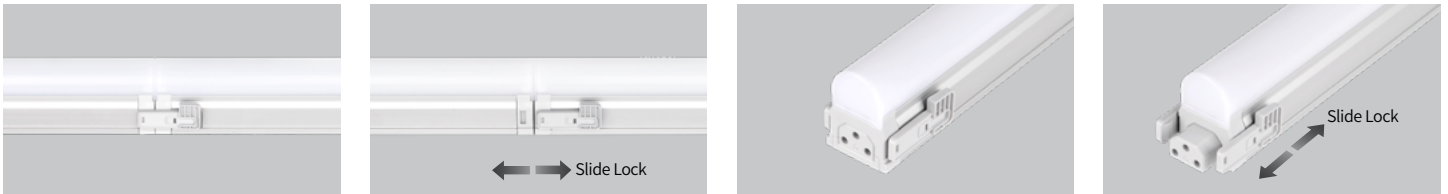


INSTALLATION

- SSL (Non-Dimming)

★ **Before Installation**
Power Connection
SSLPC (1800mm)

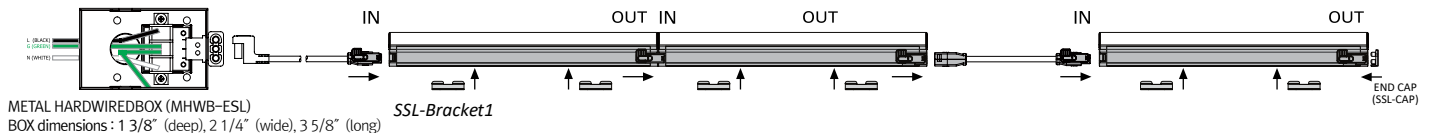


★ **After Installation**

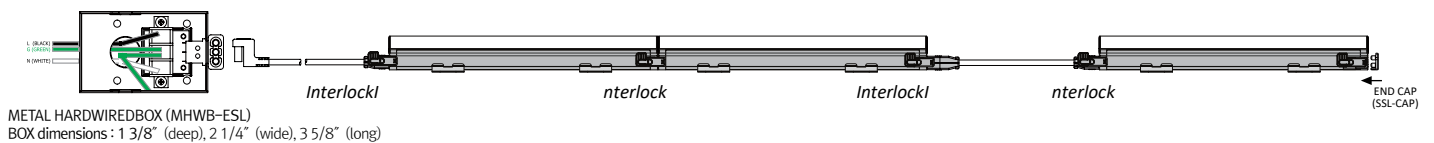


BEAM SPREADS


SSL10 40K-UNV-C90
101 lm/W
982 lm




SSL15 40K-UNV-C90
102 lm/W
1,528 lm




SSL20 40K-UNV-C90
103 lm/W
2,056 lm




ACCESSORIES

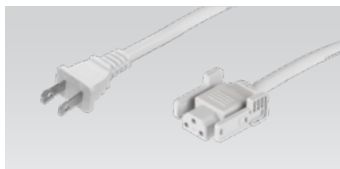

Power Cord (6')
SSLPC120/XL

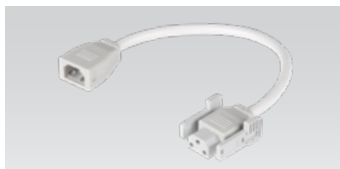


Connecting Cable
SSLPTC/XL (6")
SSLPTC1/XL (1')
SSLPTC2/XL (2')
SSLPTC4/XL (4')
SSLPTC6/XL (6')

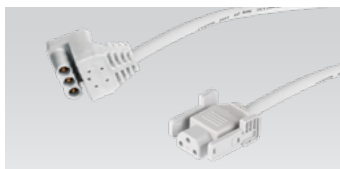

Interface Cables
ESLSSLPTC/XL (6")
ESLSSLPTC1/XL (1')
ESLSSLPTC2/XL (2')
ESLSSLPTC4/XL (4')
ESLSSLPTC6/XL (6')




Hard Wire Box
MHWB-ESL



Mounting bracket (Included fixture)
__SSL-BRACKET1 : 1set = 3pcs



Angle Brackets (Optional)
__SSL-BRACKET2 : 1set = 3pcs



Magnet Brackets (Optional)
__SSL-BRACKET-M : 1set = 3pcs