

FLC75-24V/XL

UL/cUL Listed LED Driver



FEATURES

- SMPS with 12-way distributor and power cord and plug: 6ft (1800mm)
- Electronic Safety Isolating Transformer for 24V DC LED up to 75W
- Input: 120V, 50/60Hz
- Output: Max. 3.15A, LED LAMP Max.75W
- Constant 24VDC
- Protected against short-circuit , overload and no-load
- Class II protection against electric shock from direct and indirect contact
- Auto restart after faulty condition removal
- No load power consumption $\leq 0.7W$ (AC120V)
- Efficiency $\geq 88\%$ (AC120V, full load)
- Minimum Load: 1 Watt


STANDARD

- EN61347-1, EN61347-2-13, EN55015, EN61000-3-2, EN61000-3-3, EN61547
- ANSI/UL Std.1310 , CAN/CSA Std.C22.2 No.223

Model Number	Rated Input Voltage	Constant Output Voltage	Load	Ta	Tc	Approval
FLC75-24V/XL	AC120V, 50/60Hz	DC 24V	MAX 75W	-4°F – 113°F	176°F	ETL, CE, PSE, CCC, EAC, RCM

DIMENSIONS

A	B	C
inches (mm)	inches (mm)	inches (mm)
7.08" (180)	2.36" (60)	1.25" (32)

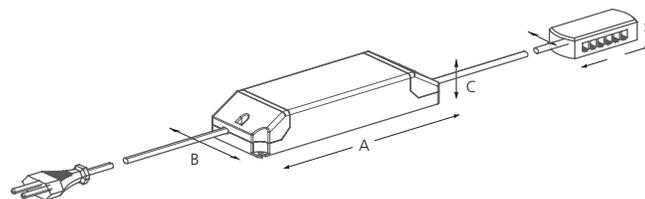

SPECIFICATIONS ARE SUBJECT TO CHANGE AT MANUFACTURER'S DISCRETION AND WITHOUT NOTICE.



Project Name: _____

Designer: _____

Fixture Type: _____