


FLX Spot DVP


: LED for display, showcase, ceiling, wall

Versatile Mini LED Spotlight


FEELUX

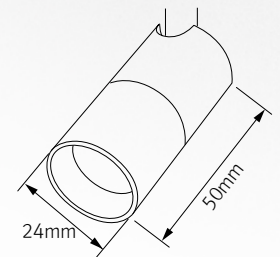

Swivel Mini LED Spotlight

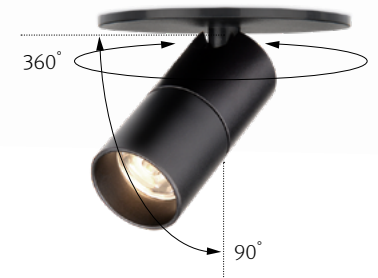

Round surface type

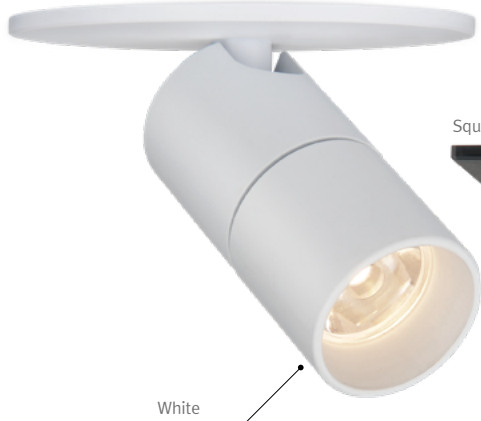

White


Square surface type



Black



Silver

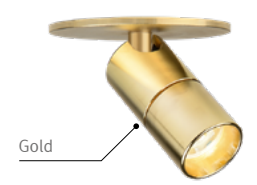



Gold

DIVA Point : FLX Spot DVP



- To be used with constant voltage DC 24V driver
- Mini spotlight with various beam angle
- Dimmable with available accessories
- Available in black and white

Model Name	DVP3 40K-24V-C90-BK-28
Color	Black, White
Power Input	DC 24V
Lamp Power	2.6 W
Lumens	253.1 lm
Efficiency	97.7 lm/w
Color Rendering	Ra > 90
Available Color	2,700K/3,000K/3,500K/4,000K
Beam Angle	28° 40° 50°
Operating Temperature	0 ~ 45°C

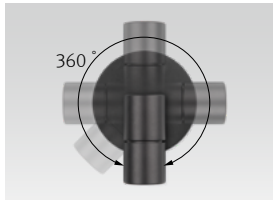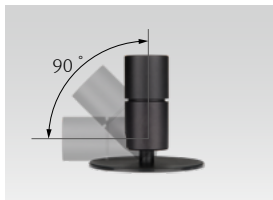


송강 정철-사미인곡




FLX Spot DVP


Versatile Mini LED Spotlight

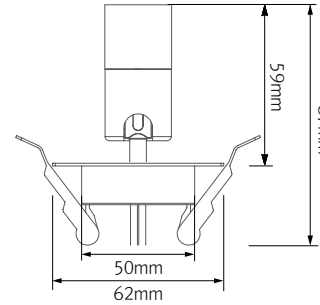


Hole Diameter



Round surface Type

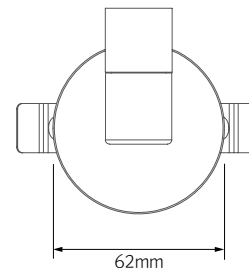

Square surface Type

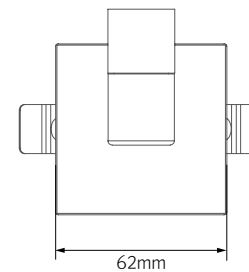

① FLX Spot DVP

Black	White
DVP3 40K-24V-BK	DVP3 40K-24V-WT

② LED Driver with 12way distributor, with power cord (1,800mm)

Part No	FLC30-24V/T	FLC75-24V-P/T
Capacity	30W 24V	75W 24V
Max connection	10	25

③ LED Driver : FLC200-24V/T (200W DC24V)
LED Driver With 12way distributor

④ Dimming Interface (1-10V) : FDC-L10
Max. 100W (100W/CH, 1CH)

⑤ Dimming Interface (0-10/1-10,DMX512)
FDA-L2M0 : Max. 200W (100W/CH, 2CH)
FDA-L5M : Max. 200W (50W/CH, 5CH)

⑥ Dimming Interface (Dail) : FDD-L1DA
Max. 200W (100W/CH, 1CH)

⑦ Door and motion detection sensor (DC) : FLS-M24V
Voltage : DC 24V

⑧ Human-body detection sensor (DC) : FLS-P24V
Voltage : DC 24V

