
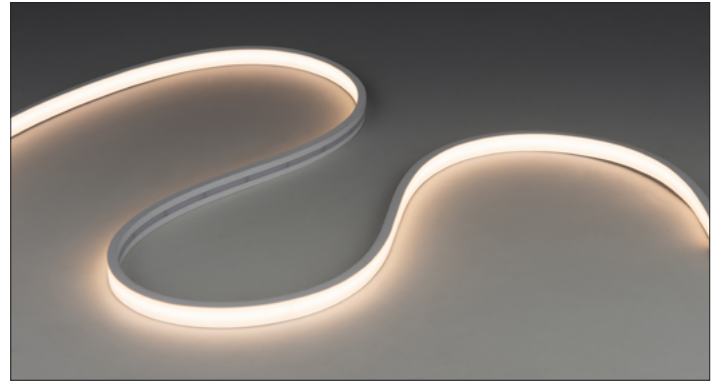


## PRODUCT IMAGE

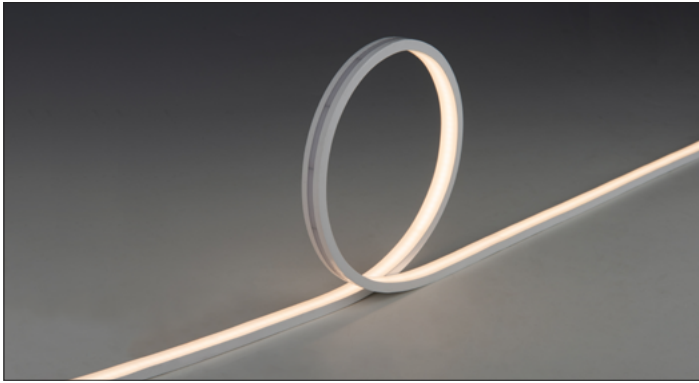

## PRODUCT FEATURES

- Seamless Dot-Free Illumination
- Ultra Slim
- High Efficiency / High Output
- High CRI (CRI 90)
- Close Pitch LEDs
- Bend Direction Vertically
- Indoor/Outdoor Application (IP66)
- Field Cut-table (33.3mm)
- Available in Standard Lengths of 5M reels
- Dimmable


## PRODUCT SPECIFICATIONS

IP Rate	IP66 with Factory Termination (Customized Length Available)
Lamp Power	15W/m
Power Input	24V DC
Color Rendering	Ra>90
Operating Temperature Ranges	0-45°C
Beam Angle	110°
Material	Silicon
Available Color	2700K, 3000K, 3500K, 4000K

## SPECIFICATIONS TABLE


Model Number	Color	Lamp Power	Luminous Flux (lm/ft)	Lumen/W
FTP15 27K-24V-C90	2700K	4.2W/f	415lm	98.24/W
FTP15 30K-24V-C90	3000K	4.3W/f	440lm	103.02/W
FTP15 35K-24V-C90	3500K	4.3W/f	465lm	109.44/W
FTP15 40K-24V-C90	4000K	4.4W/f	476lm	108.7/W

## PHYSICAL SPECIFICATIONS

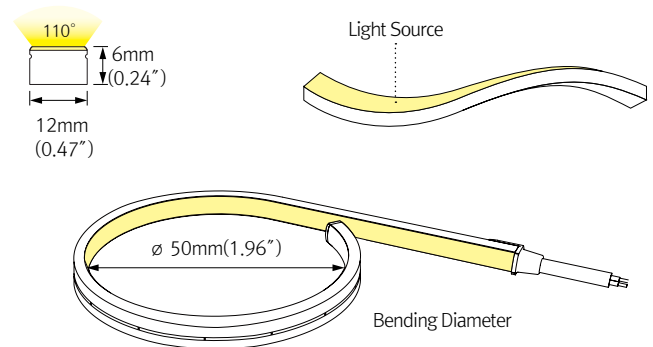


## PHYSICAL SPECIFICATIONS

Model Number	A Length	B Cutting Unit	C Width	D Thickness
FTP15 (color)-24V-C90	1,012mm (39.84")	33.3mm (1.31")	12mm (0.47")	6mm (0.24")

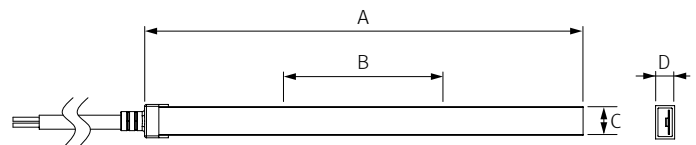


## DIMENSIONS


TOP VIEW

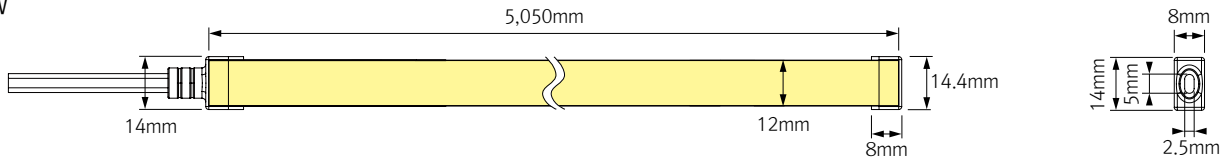

SIDE VIEW





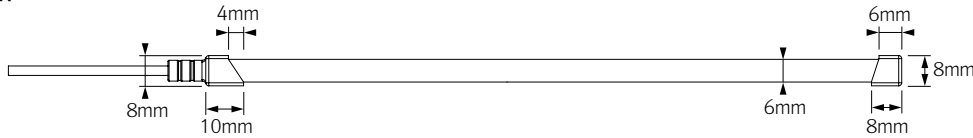


BOTTOM VIEW

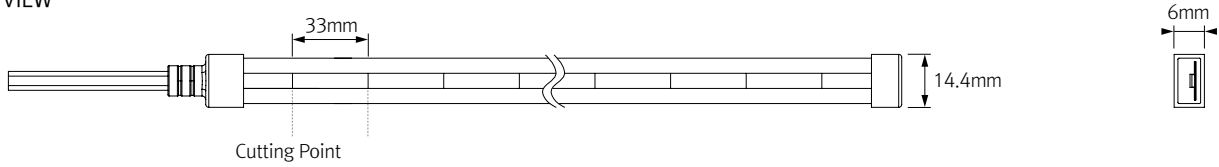


## INSTALLATION - Bracket

FTP-BRACKET1

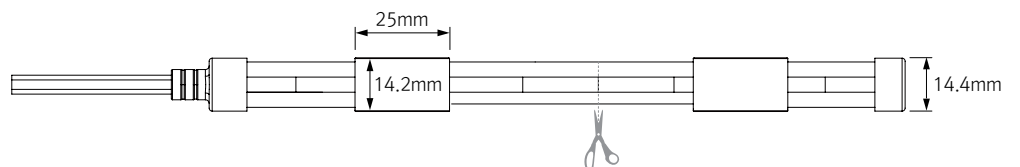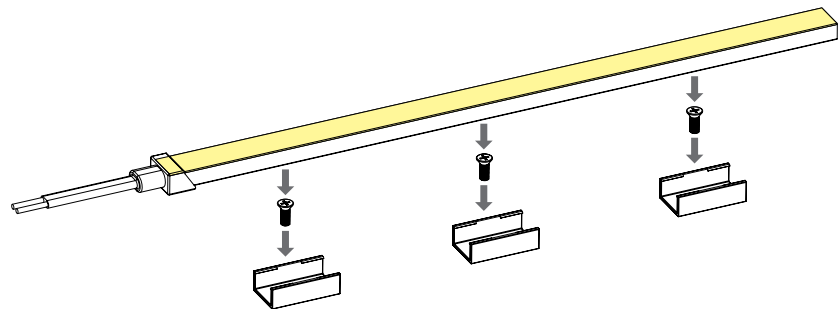


## INSTALLATION - Extrusion

### FTP-EXL

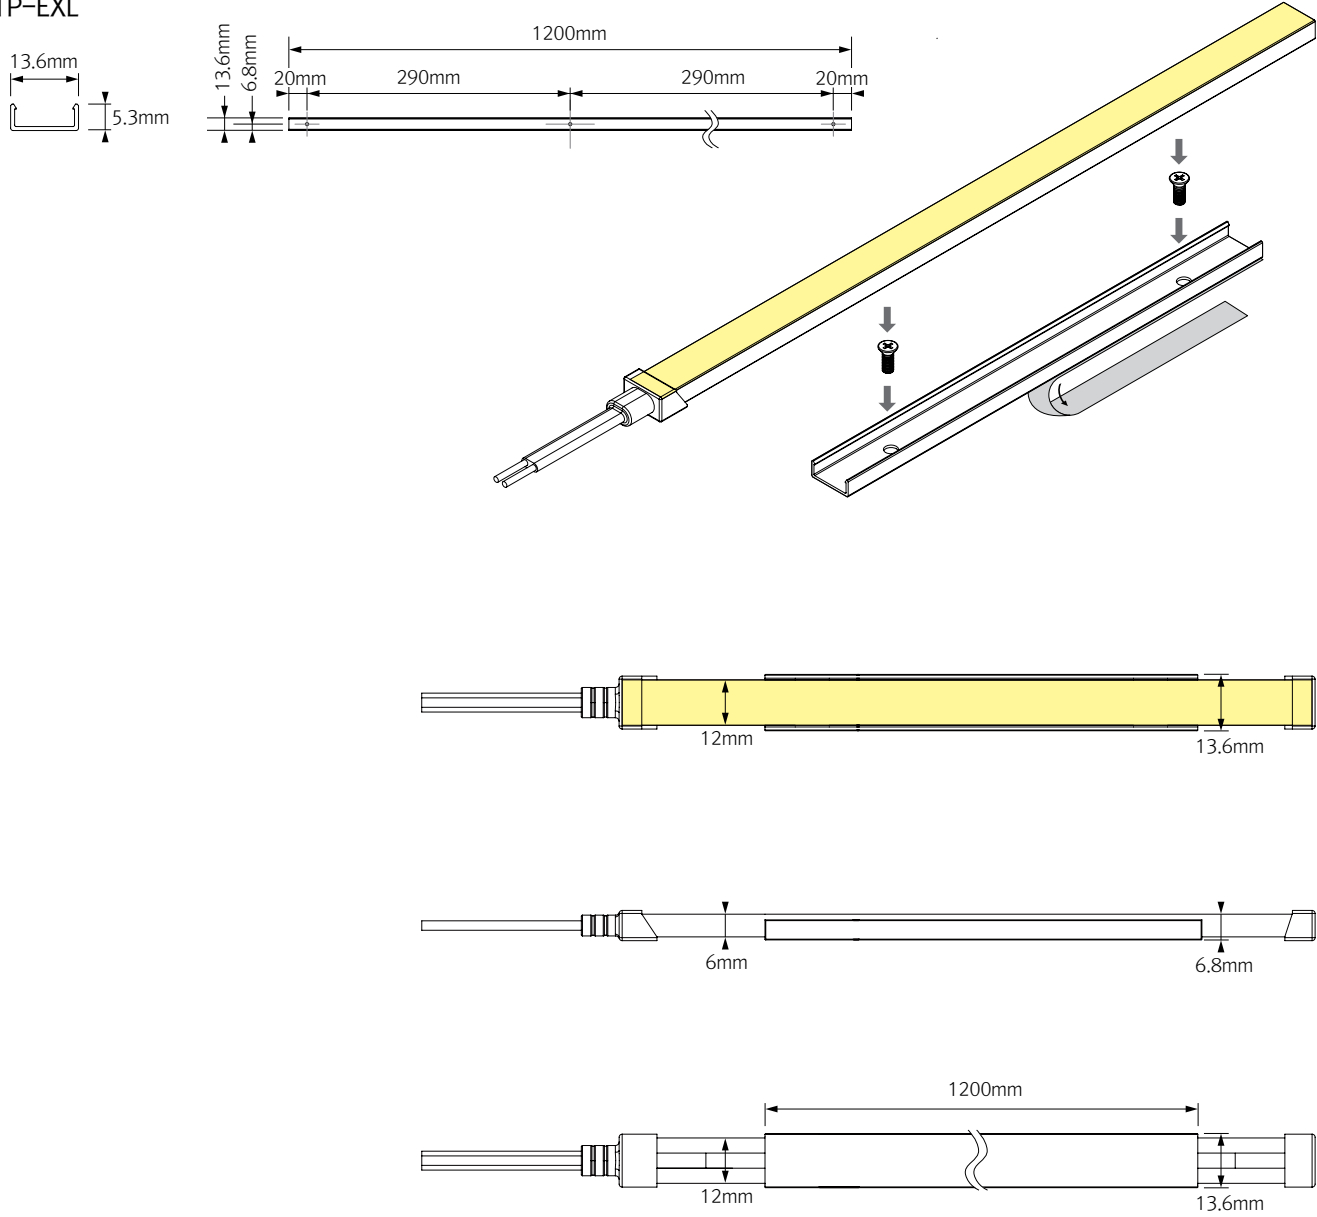


## INSTALLATION - Indoor Termination (IP20)

### \* Components

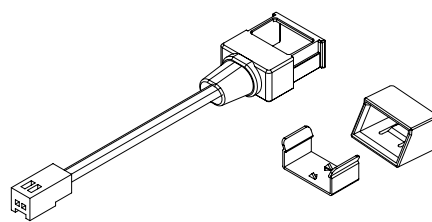


FTP-INPC  
- Indoor Power Cable with END CAP




FTP-INCP  
- Indoor Direct Connector

\* Expanded View

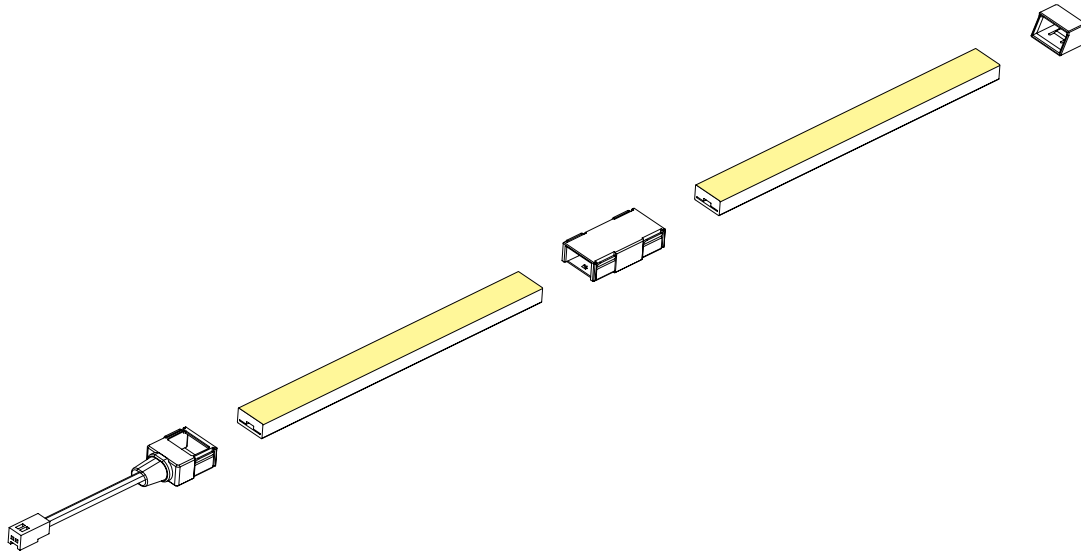


\* Installation Method




① FTP-INPC

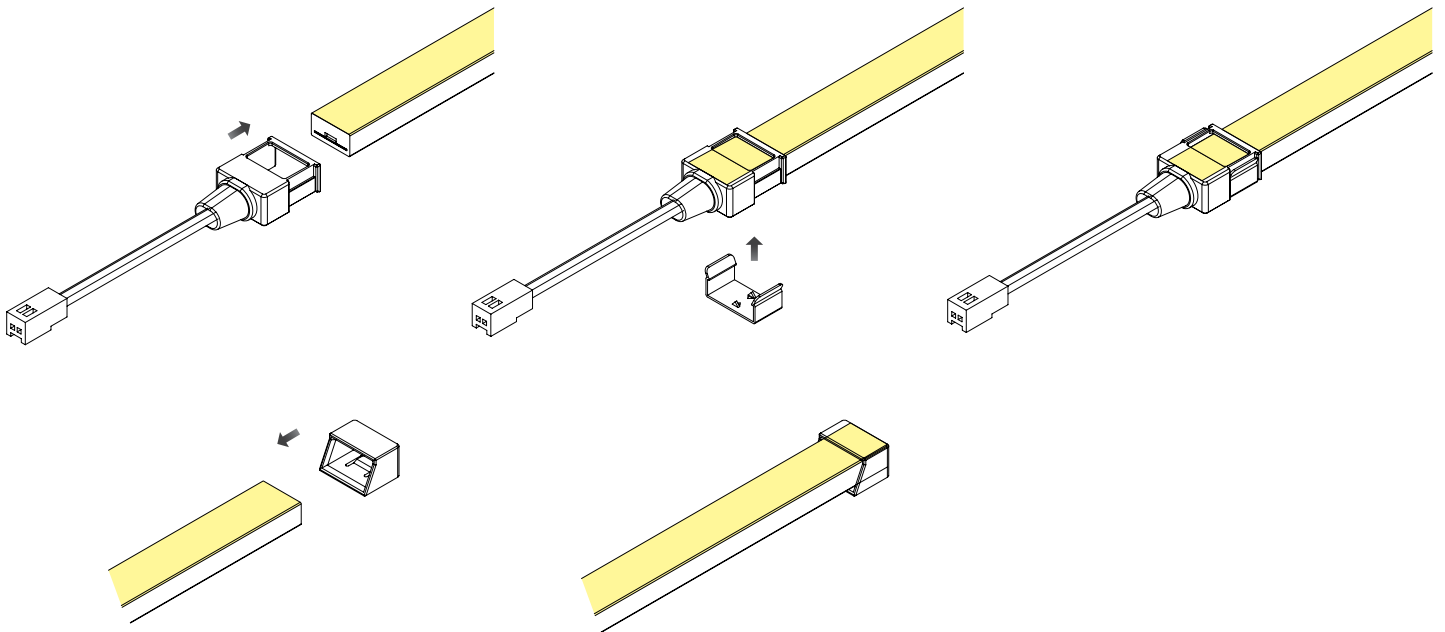

② FTP-INCL

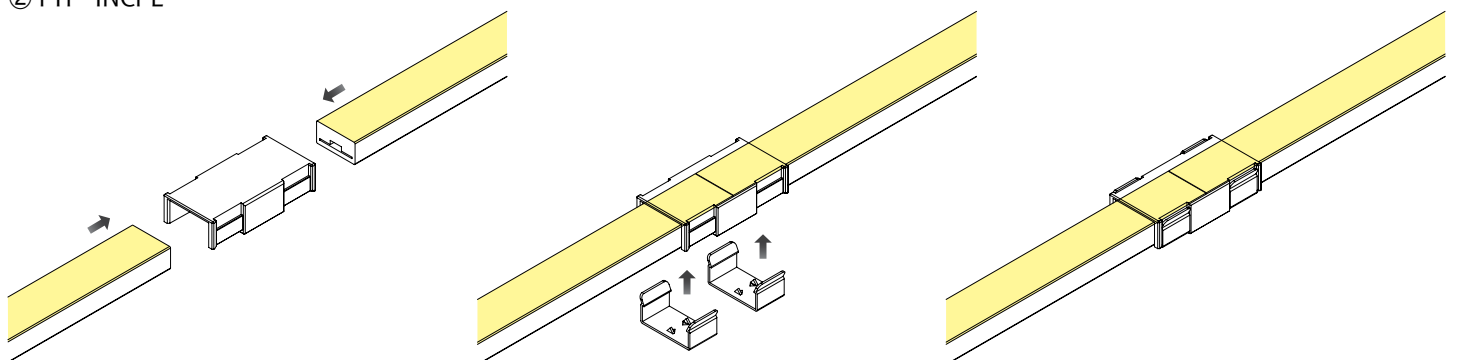


\* Finished view

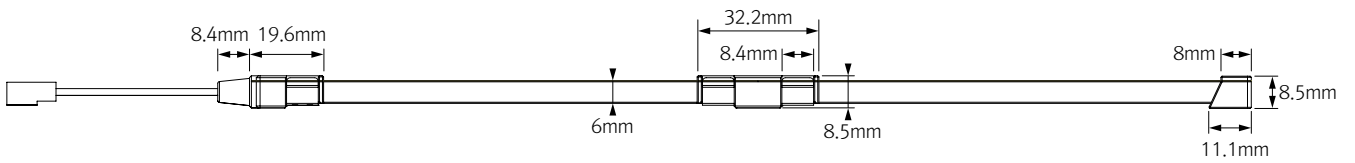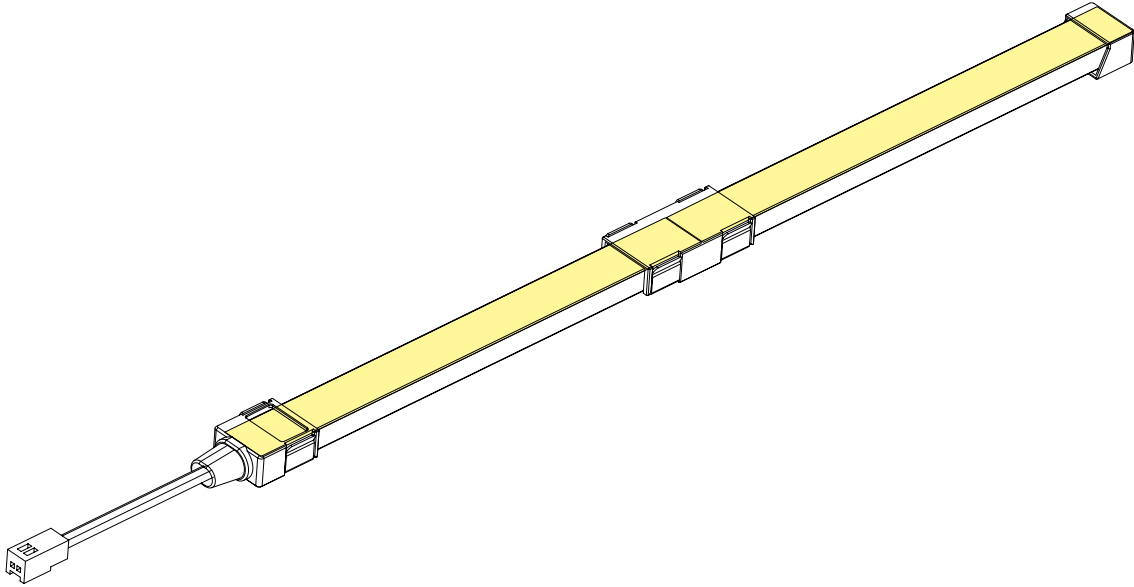

## COMPONENTS


---




**Mounting Brackets**  
\_FTP-BRACKET1



**FTP Extrusion Line**  
\_FTP-EXL (1200mm)

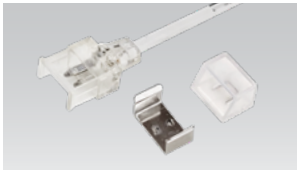

**Indoor Power Cable**  
\_FTP-INPC (200mm)  
with END CAP

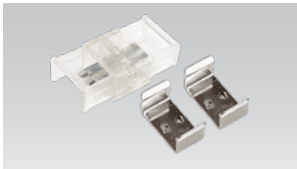

**Indoor Direct Connector**  
\_FTP-INCPL