

DATE

PROJECT

TYPE



PRODUCT FEATURES

- Flexible luminaire with optics
- Fully sealed with PU material for wet location
- IP67 rated for outdoor and indoor application.
- Various beam angles(30°, 45°, 60°, 20x45°)
- 90+ CRI Standard
- Dimming
- Available in Standard Lengths of 1, 5M reels
- Custom length available

PRODUCT SPECIFICATIONS

IP Rate	IP67
Lamp Power	5.5W/ft(18W/m)
Power Input	24V DC
Color Rendering	Ra>90
Operating Temperature Ranges	-70°F to 113°F (-25°C to 45°C)
Maximum Length	16.49ft(5,025mm)
Minimum Length	4.92in(125mm)
Minimum Bending Diameter	5.90in(150mm)
Beam Angle	30°, 45°
Material	PU


SPECIFICATIONS TABLE



Model Number	Color	Lamp Power	Luminous Flux (lm/ft)	Lumen/W
FTT18-27K-24V	2700K	5.5W/ft	474	86lm/W
FTT18-30K-24V	3000K		494	90lm/W
FTT18-35K-24V	3500K		559	102lm/W
FTT18-40K-24V	4000K		571	104lm/W


Note
Beam Angle: 30°, 45°, 60°, 20°x45° available lens options

BENDING DIAMETER

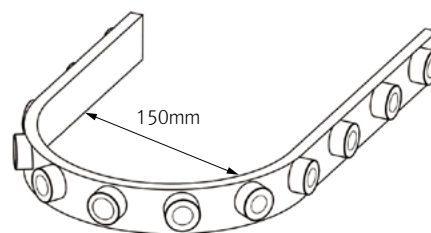


DIMENSION

Available in Standard Lengths of 1,2,3,4,5M reels

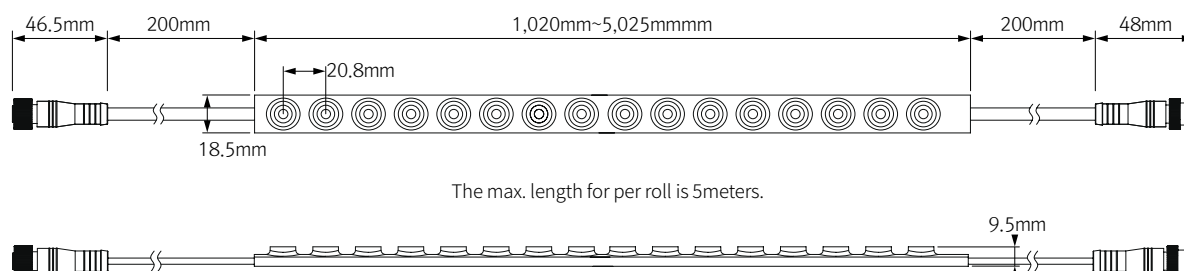

COMPONENTS



FLXible Tape Tako

FTT18-40K-24V(1M)
FTT18-40K-24V(2M)
FTT18-40K-24V(3M)
FTT18-40K-24V(4M)
FTT18-40K-24V(5M)



FTT18-Angle Bracket

Angle Bracket for Aluminum extrusion (1pc)




FTT18-Bracket

Bracket with screw (1pc)



FTT18-Strap

Silicone STRAPS with screws
(10pcs + 20 screws)



FTT18 Extrusion Line

FTT-EXL(1M)




Power Cable

FTT18-PC(112")



Male and Female Connector

FTTPTC



T-Type Connector

FTTPTC-T