




- Discreet design (small in size and light in weight)
- Various beam angles (30°, 45°, 60°, 20*45°)
- Flexible system
- PU material resistant to UV, chemical materials, high temperature etc
- SDCM 3 Lumileds Led and One Bin Only to ensure color consistency
- IP67 for outdoor and indoor use

DIMENSION

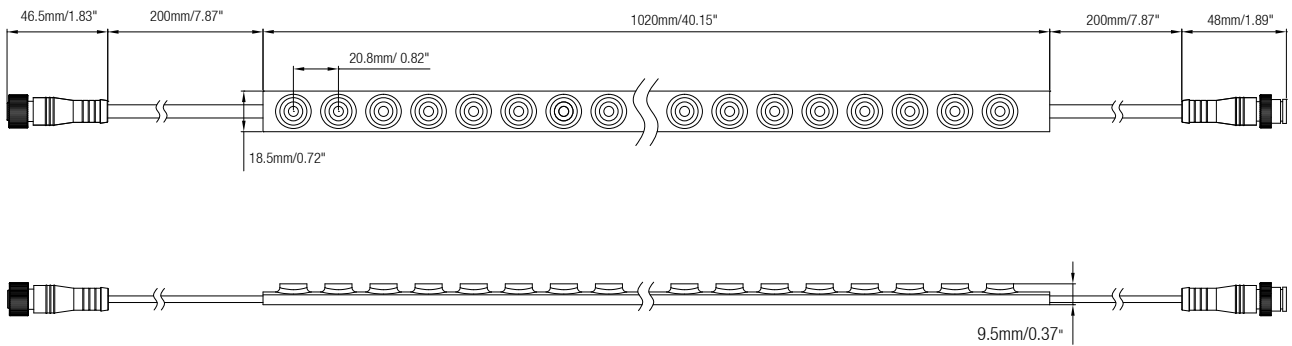

Electrical data

| | |
|---------------------|--|
| Lumen efficiency | 103lm/w(4000K, 30°) |
| Ra | Ra90 |
| SMD Type | 2835 |
| LEDs/m | 48LEDs/m |
| Power/m | 18w/m |
| Voltage | DC24V(23.5Vmin, 24.5Vmax) |
| Max Reel Length | 5000mm |
| Unit cut | 125mm |
| Storage Temperature | -25°C / -13°F _{min} , 60°C / 140°F _{max} |
| LED PIN Temperature | Max.65°C / 149°F |
| Life Span | >54000H |
| Waterproof rate | IP67 |
| Warranty | 5 Years |


(Lm/m)

| CCT \ Optics | 2700K | 3000K | 3500K | 4000K | Max. Run Length |
|--------------|-------|-------|-------|-------|-----------------|
| 30° | 1544 | 1671 | 1711 | 1854 | 6M |
| 45° | 1554 | 1764 | 1525 | 1876 | 6M |
| 60° | 1580 | 1644 | 1862 | 1903 | 6M |
| 20*45° | 1484 | 1597 | 1693 | 1583 | 6M |

Note:

-Max production length is 5M for per roll.

Binning

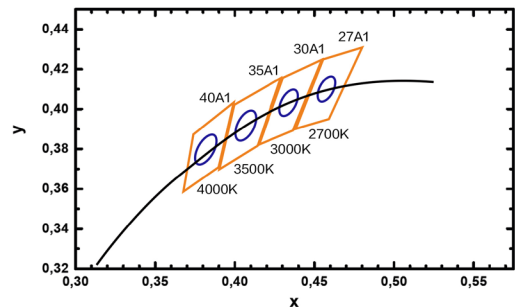

- Black Body Curve
- JRLite Binning
- ANSI Binning



Optics 30°



Optics 45°



Optics 60°



Optics 20*45°



ONE BIN ONLY
Color consistency
Today and tomorrow

ACCESSORIES




Mounting set



Male and Female Connector



T Type Connector



Aluminium Profile




Angle Mounting Clips



Mounting Clips

WIRING

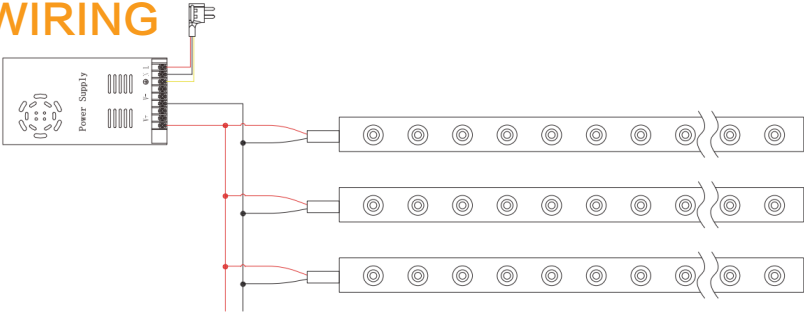

-Max. length per circuit is 6m, if it exceeds 6m, please split into multiple circuits.

-Please contact us if >150W power supply is needed.