



PRODUCT FEATURES


- Cut-out types: Round
- Multi beam angles 15°, 24°, 36°
- Single head
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x12W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 90mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 36V, 280mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm)	Lumen/W
FLD12 27K-280mA-R	2700K	12.3W	723.1lm	58.79l/m
FLD12 30K-280mA-R	3000K	12.3W	761.2lm	61.89l/m
FLD12 40K-280mA-R	4000K	12.3W	842.2lm	68.47l/m

DIMENSIONS

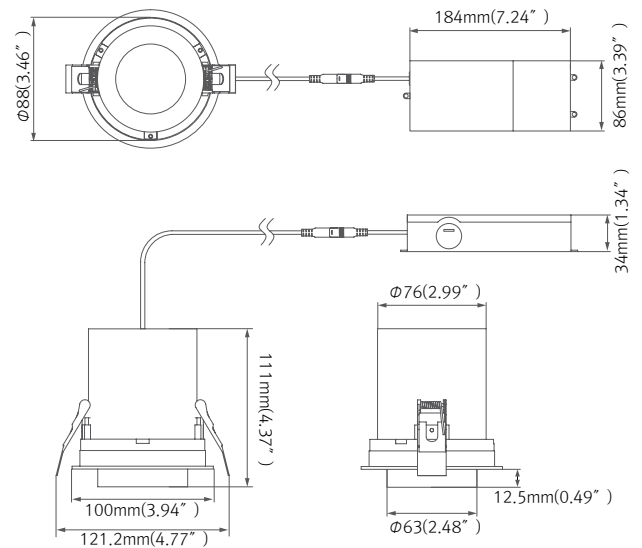

MODEL SELECTION KEY

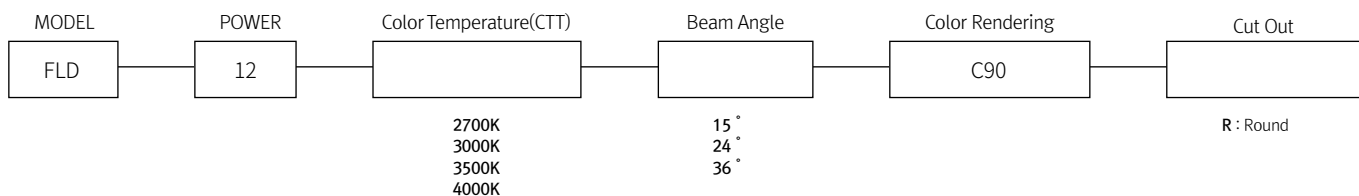



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Single head
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x12W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 90mm
- Housing : 6063 aluminum. with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 36V, 280mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD12 27K-280mA-S	2700K	12.3	723.1	58.79
FLD12 30K-280mA-S	3000K	12.3	761.2	61.89
FLD12 40K-280mA-S	4000K	12.3	842.2	68.47

DIMENSIONS

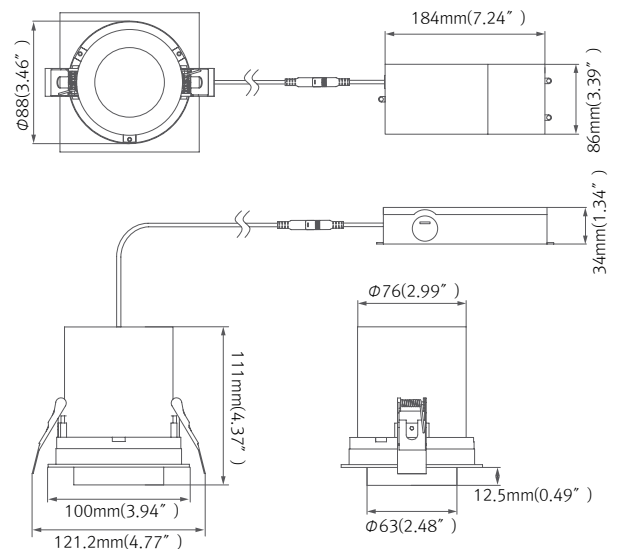

MODEL SELECTION KEY

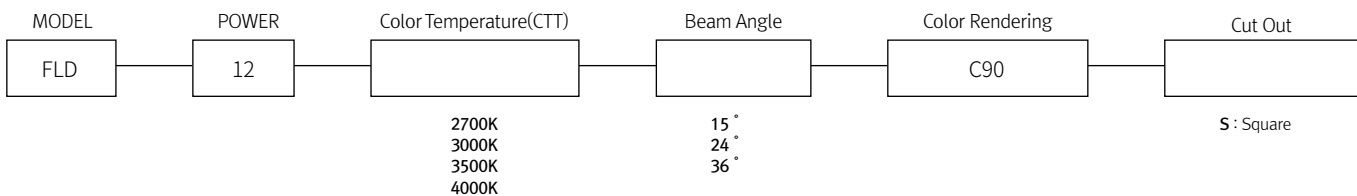



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Double head(s)
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x12W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 175x90mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 2x36V, 280mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD12 27K-280mA-2S	2700K	24.8W	1375.8lm	55.48l/w
FLD12 30K-280mA-2S	3000K	24.5W	1504.2lm	61.40l/w
FLD12 40K-280mA-2S	4000K	24.7W	1620.6lm	65.61l/w

DIMENSIONS

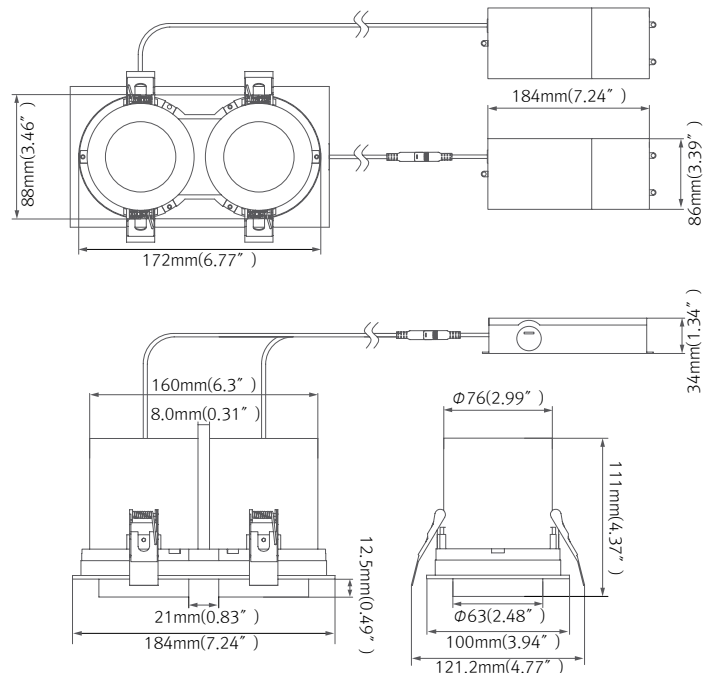

MODEL SELECTION KEY

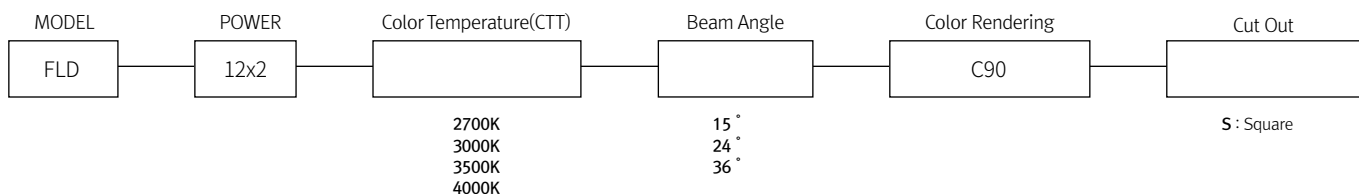



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Triple head(s)
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x12W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 260x90mm
- Housing : 6063 aluminum. with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 3x36V,280mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD12 27K-280mA-3S	2700K	37.2W	2008.3lm	53.99l/m
FLD12 40K-280mA-3S	4000K	37.2W	2158.6lm	58.03l/m

DIMENSIONS

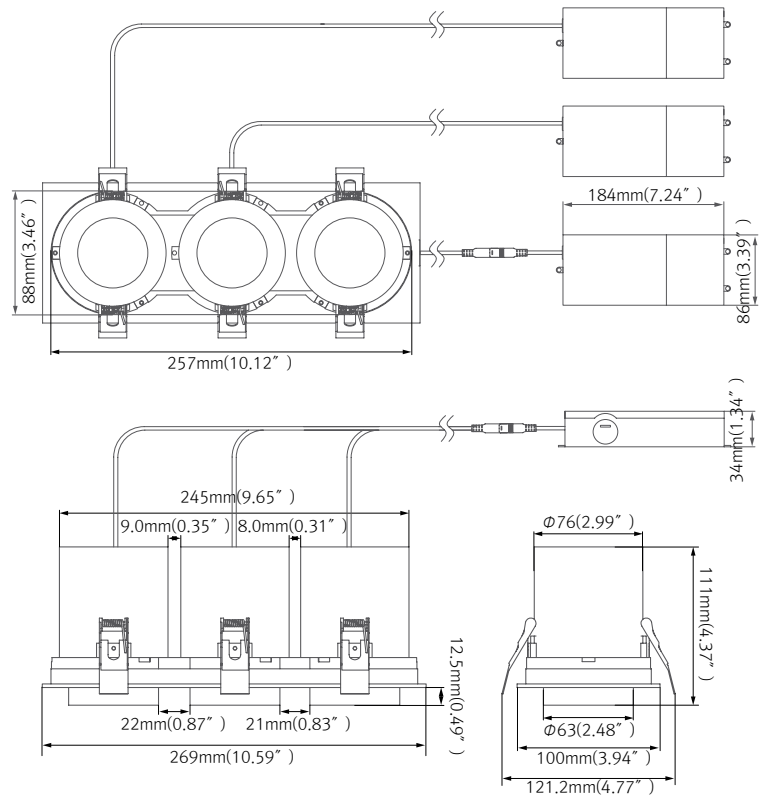

MODEL SELECTION KEY

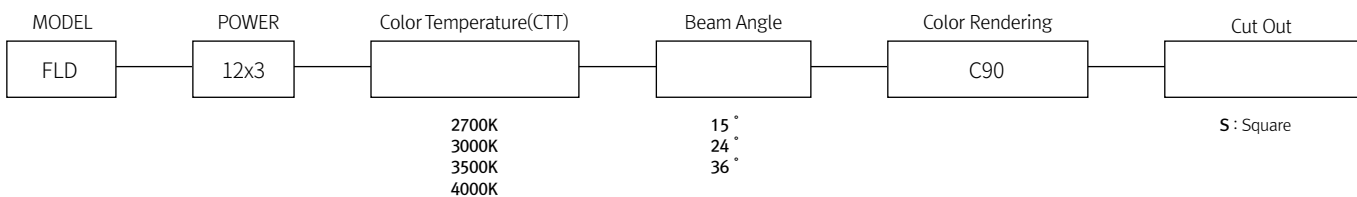



PRODUCT FEATURES


- Cut-out types: Round
- Multi beam angles 15°, 24°, 36°
- Single head
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x25W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 120mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 36V, 600mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD25 27K-280mA-R	2700K	26.1w	1680.6lm	64.39l/w
FLD25 30K-280mA-R	3000K	26.2w	1918.8lm	73.24l/w
FLD25 40K-280mA-R	4000K	25.6w	2205.2lm	86.14l/w

DIMENSIONS

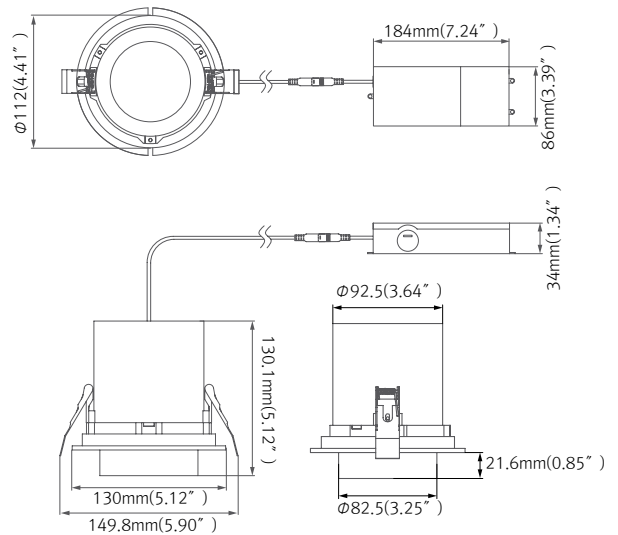

MODEL SELECTION KEY

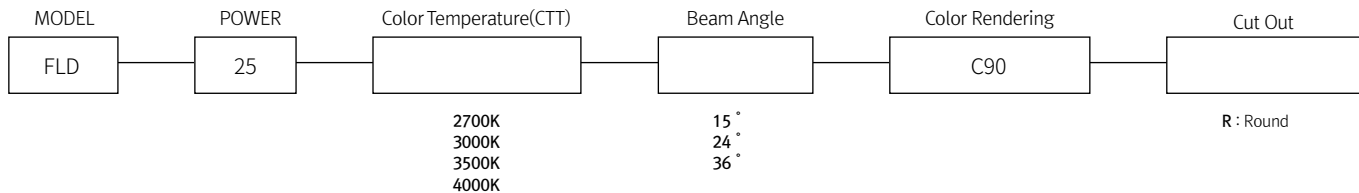



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Single head
- High performance COB chip with CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x25W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 120mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 36V, 600mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD25 27K-280mA-S	2700K	26.1W	1680.6lm	64.39l/m
FLD25 30K-280mA-S	3000K	26.2W	1918.8lm	73.24l/m
FLD25 40K-280mA-S	4000K	25.6W	2205.2lm	86.14l/m

DIMENSIONS

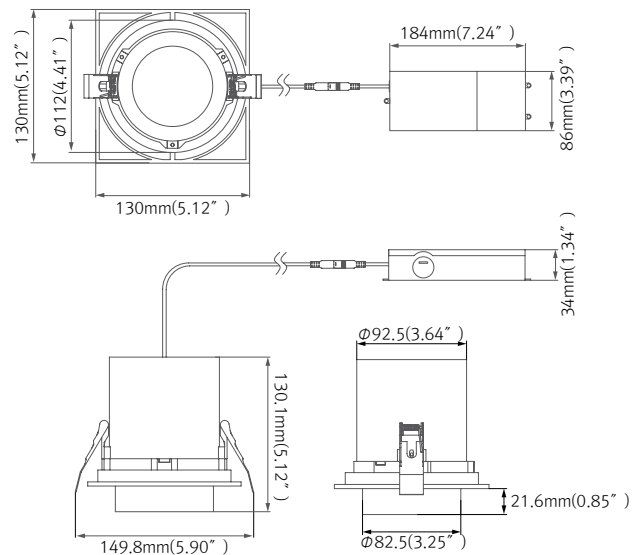

MODEL SELECTION KEY

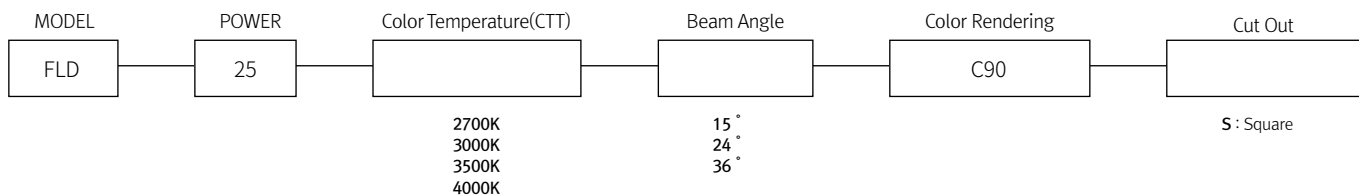



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Double head(s)
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS


- Power : 1x25W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 230x120mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 2x36V,600mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD25 40K-280mA-2S	4000K	51.5W	4201.7lm	81.59l/m

DIMENSIONS

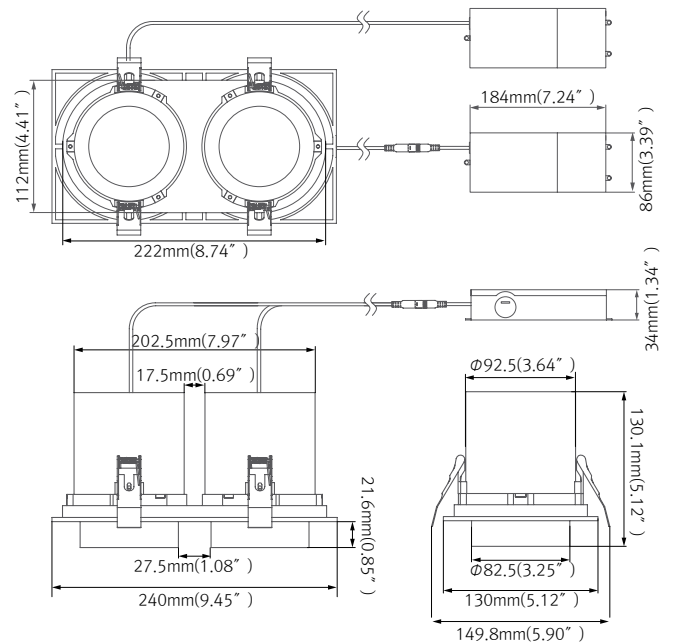

MODEL SELECTION KEY

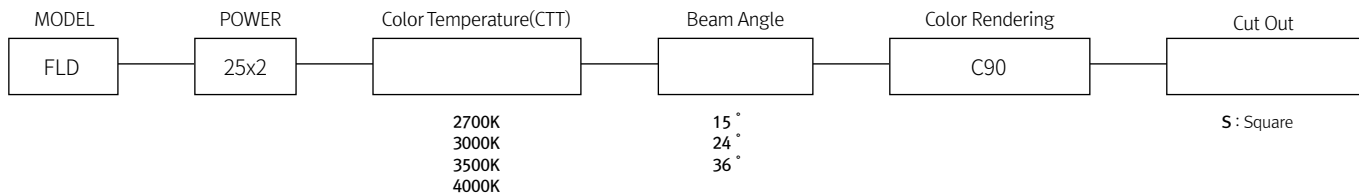



PRODUCT FEATURES


- Cut-out types: Square
- Multi beam angles 15°, 24°, 36°
- Triple head(s)
- CRI90
- Recessed mounted, achieves 360 degrees rotational light projection
- Dimmable
- IP20
- Flicker Free
- 0-10V, 1-10V Dimming

PRODUCT SPECIFICATIONS

- Power : 1x25W
- Available Color : 2700K, 3000K, 3500K, 4000K
- Beam Angle : 15°, 24°, 36°
- Cut-out : 335x120mm
- Housing : 6063 aluminum, with painting finishing
- Heat sink : Die cast aluminum
- Power supply : 3x36V,600mA
- Operating Temperature : 20°C ~ 45°C
- Life time : 30,000h

Model Number	Color	Lamp Power(W)	Luminous Flux (lm/ft)	Lumen/W
FLD25 40K-280mA-3S	4000K	77W	5556.7lm	72.16l/m

DIMENSIONS

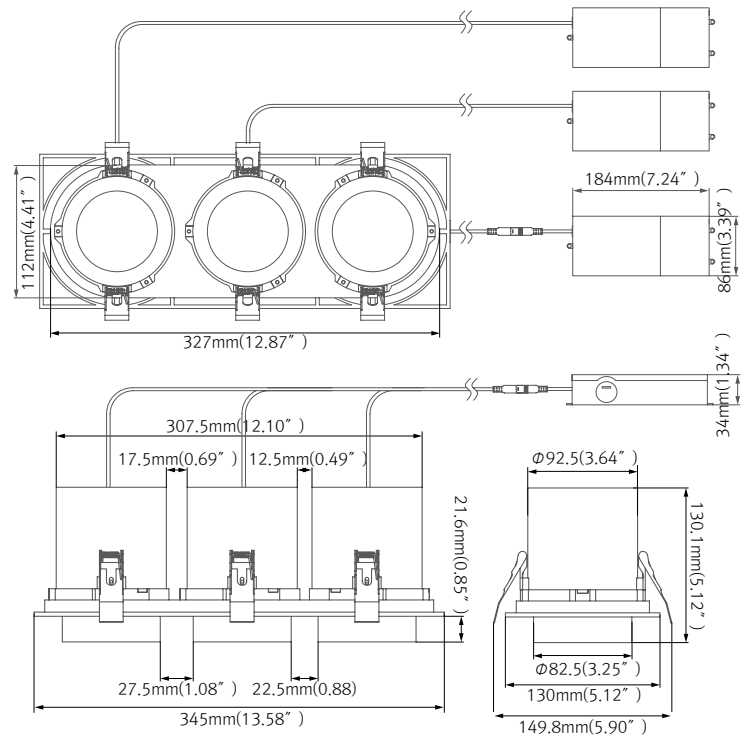

MODEL SELECTION KEY

